

# Safe Work Practices for Handling Lead



## About WorkSafeBC

---

At WorkSafeBC, we're dedicated to promoting safe and healthy workplaces across B.C. We partner with workers and employers to save lives and prevent injury, disease, and disability. When work-related injuries or diseases occur, we provide compensation and support injured workers in their recovery, rehabilitation, and safe return to work. We also provide no-fault insurance and work diligently to sustain our workers' compensation system for today and future generations. We're honoured to serve the workers and employers in our province.

## Prevention Information Line

---

We provide information and assistance with health and safety issues in the workplace.

Call the information line 24 hours a day, 7 days a week to report unsafe working conditions, a serious incident, or a major chemical release. Your call can be made anonymously. We can provide assistance in almost any language.

If you have questions about workplace health and safety or the Occupational Health and Safety Regulation, call during our office hours (8:05 a.m. to 4:30 p.m.) to speak to a WorkSafeBC officer.

If you're in the Lower Mainland, call 604.276.3100. Elsewhere in Canada, call toll-free at 1.888.621.7233 (621.SAFE).

# Safe Work Practices for Handling Lead

## Health and safety resources

---

You can find our health and safety resources on [worksafebc.com](http://worksafebc.com), and many of them can be ordered from the WorkSafeBC Store at [worksafebcstore.com](http://worksafebcstore.com).

In addition to books, you'll find other types of resources at the WorkSafeBC Store, including DVDs, posters, and brochures. If you have any questions about placing an order online, please contact a customer service representative at 604.232.9704, or toll-free at 1.866.319.9704.

ISBN 978-0-7726-7117-2

© 2017 Workers' Compensation Board of British Columbia. All rights reserved. The Workers' Compensation Board of B.C. encourages the copying, reproduction, and distribution of this document to promote health and safety in the workplace, provided that the Workers' Compensation Board of B.C. is acknowledged. However, no part of this publication may be copied, reproduced, or distributed for profit or other commercial enterprise, nor may any part be incorporated into any other publication, without written permission of the Workers' Compensation Board of B.C.

# Contents

---

<b>Introduction</b> . . . . .	<b>1</b>
Who should read this manual? . . . . .	1
What does ALARA mean? . . . . .	1
Use this manual as a starting point . . . . .	2
<b>Part 1 — About lead</b> . . . . .	<b>3</b>
<b>What is lead?</b> . . . . .	<b>4</b>
Lead process activities . . . . .	4
Lead-containing paints and coatings . . . . .	6
<b>What are the health effects of lead exposure?</b> . . . . .	<b>7</b>
Common signs and symptoms . . . . .	8
Possible health effects . . . . .	8
Measuring lead in the body . . . . .	9
<b>Industry terms and definitions</b> . . . . .	<b>10</b>
<b>Regulation requirements</b> . . . . .	<b>13</b>
Sections 6.58.1–6.69, Lead . . . . .	13
Guideline G6.60, Lead — Exposure control plan . . . . .	14
Guideline G6.61.1, Exception to monitoring requirements — Objective air monitoring data and associated record-keeping . . . . .	14
Sections 5.48–5.59, Controlling exposure . . . . .	14
Guideline G5.53-4, Occupational hygiene methods acceptable to WorkSafeBC . . . . .	15
Guideline G5.54-5, Health monitoring . . . . .	15
Section 12.115, Coatings on metals . . . . .	15
Section 20.2(1), Notice of project — Hazardous substances . . . . .	15
Section 20.112, Hazardous materials . . . . .	16
<b>Who is qualified to deal with lead?</b> . . . . .	<b>17</b>
<b>Part 2 — Preventing lead exposure at work</b> . . . . .	<b>19</b>
<b>Who has responsibility for health and safety in the workplace?</b> . . . . .	<b>20</b>
Owners . . . . .	20
Employers . . . . .	20
Prime contractors . . . . .	21

Supervisors . . . . .	21
Workers . . . . .	22
Consultants . . . . .	22
<b>How do you assess the lead risk? . . . . .</b>	<b>23</b>
Lead hazard identification. . . . .	23
Lead risk assessment. . . . .	23
Exposure monitoring. . . . .	24
Objective air monitoring data . . . . .	25
Lead on surfaces . . . . .	26
<b>How do you prevent lead exposure at work? . . . . .</b>	<b>28</b>
Substitution . . . . .	28
Engineering controls . . . . .	28
Administrative controls . . . . .	33
Personal protective equipment (PPE) . . . . .	37
<b>What is an exposure control plan? . . . . .</b>	<b>40</b>
Who needs an exposure control plan for lead? . . . . .	40
Elements of an exposure control plan . . . . .	41
<b>What is a respirator program? . . . . .</b>	<b>46</b>
Elements of a respirator program . . . . .	46
Fit testing. . . . .	46
<b>Do you need to submit a Notice of Project (NOP)? . . . . .</b>	<b>49</b>
<b>How do you test and dispose of lead waste? . . . . .</b>	<b>51</b>
<b>How do you prepare for emergencies? . . . . .</b>	<b>52</b>
Medical emergency procedures . . . . .	52
<b>Part 3 — Lead-containing paints and coatings in the construction industry . . . . .</b>	<b>55</b>
<b>What is a lead-containing paint? . . . . .</b>	<b>56</b>
<b>Classifying the risk of lead paint abatement work . . . . .</b>	<b>58</b>
Low-risk activities . . . . .	59
Low-moderate-risk activities . . . . .	59
Moderate-risk activities . . . . .	60
Moderate-high-risk activities . . . . .	60
High-risk activities. . . . .	60
<b>Control measures for working with lead paints and coatings. . . . .</b>	<b>61</b>

<b>Specific lead paint and coating removal operations . . . . .</b>	<b>66</b>
Dry abrasive blast cleaning and vacuum blast cleaning . . . . .	66
Wet abrasive blast cleaning . . . . .	67
Dry-ice blasting . . . . .	68
High-pressure waterjetting . . . . .	68
Manual scraping and sanding . . . . .	69
Heat guns . . . . .	70
Chemical removal . . . . .	71
Welding, burning, and torch cutting . . . . .	72
Manual demolition . . . . .	73
Power tools . . . . .	74
Spraying lead-containing paint . . . . .	75
<b>Appendices . . . . .</b>	<b>77</b>
<b>Appendix A: Testing for lead . . . . .</b>	<b>78</b>
<b>Appendix B: Example lead clearance levels by jurisdiction, organization, or company . . . . .</b>	<b>82</b>
<b>Appendix C: Sample exposure control plan for removing lead-containing paint using hand tools . . . . .</b>	<b>84</b>
<b>Appendix D: Guide to health monitoring . . . . .</b>	<b>92</b>
<b>Appendix E: Training courses . . . . .</b>	<b>97</b>
<b>Appendix F: References . . . . .</b>	<b>98</b>





# Introduction

---

Lead is a naturally occurring, greyish metal that is used in a wide variety of consumer and industrial products. It is also a hazardous material. If employers and workers do not take proper precautions for work around lead, workers may develop serious health problems. To prevent these health problems, WorkSafeBC has developed requirements detailed in the Occupational Health and Safety Regulation.

## Who should read this manual?

---

This manual is for employers, supervisors, workers, and occupational health and safety consultants who may come into contact with lead, lead products, or lead-containing paints and coatings. It provides information about lead exposure and assists employers in developing suitable safe work procedures. If you are involved with a lead work process or an activity that could disturb lead, you need to know how to work safely.

The Regulation describes requirements for workplaces in which hazardous materials, such as lead, are or may be present. This manual explains these requirements and describes how employers can meet their legal obligations to provide a safe working environment for workers.

## What does ALARA mean?

---

ALARA means **as low as reasonably achievable**. The ALARA principle applies to lead. This means that worker exposures to lead must be kept as low as reasonably achievable below the occupational exposure limit. Although the Regulation specifies exposure limits for lead, employers must further reduce or eliminate worker exposure *if it can reasonably be done*.

Lead is listed as a 2A and 2B carcinogen (probably and possibly, respectively, able to cause cancer in humans) by the International Agency for Research on Cancer. Lead also has an “R” designation in WorkSafeBC’s “Table of Exposure Limits for Chemical and Biological Substances,” meaning that the substance has an adverse reproductive effect.

Where feasible, lead-containing materials must be replaced with products that do not contain lead. Improvements in technology, as

## In the Regulation

- Sections 6.58.1–6.69, Lead
- OHS Guideline G6.60, Lead — Exposure control plan
- OHS Guideline G6.61.1, Exception to monitoring requirements
- Section 5.48, Exposure limits
- OHS Guideline G5.48-1, Table of exposure limits — background information
- Table of Exposure Limits for Chemical and Biological Substances
- Section 5.54, Exposure control plan
- Section 5.57, Designated substances

well as new work practices and procedures, will help employers reduce worker exposures and move closer to the ultimate goal of zero exposure.

### Use this manual as a starting point

This manual was developed to assist employers who have a duty under the *Workers Compensation Act* and the Occupational Health and Safety Regulation to protect workers from exposure to lead. It was also developed to raise awareness within all industries about the hazards posed by lead and to provide direction on methods that should be used to control exposure.

This document also provides basic information that employers can use to develop an exposure control plan and their own safe work procedures. If a worker is or may be exposed to potentially harmful levels of lead, the employer must ensure that a risk assessment is conducted by a qualified person. The employer must also ensure that an exposure control plan (ECP) is developed and implemented. An ECP is required under section 5.57 of the Regulation and must meet the requirements of section 5.54 of the Regulation.

This manual can help determine how a risk assessment can be used to classify the risk level of the work and to select the controls required to protect workers. Task-specific controls and personal protective equipment recommendations are included, along with a sample exposure control plan.

### **Must versus should**

In this manual, the word *must* means that a particular safety step is required by the Regulation. The word *should* indicates that a particular action, although not specified in the Regulation, will improve safety in the workplace.

### Refer to the Occupational Health and Safety Regulation

This manual is not a definitive guide and does not replace the Regulation. It complements the Regulation and is a tool to help industry work safely. You will still need to refer to the relevant sections of the Regulation (see page 13) to determine the exact requirements that apply to your operation.

# Part 1 — About lead

---

# What is lead?

---

Lead is a naturally occurring, bluish-grey metal that is soft, malleable, corrosion-resistant, and easily melted. (The melting point is 327 C.) Pure lead can combine with other substances to form various lead compounds. Lead is obtained by the smelting of ores containing lead sulphide (galena) or sulphate or carbonate ores.

Eighty percent of global lead consumption is related to lead-acid storage batteries produced for vehicles, emergency equipment, and for industry. Lead is also present in ceramic tile glazing, decorative glass, roof sheeting, rolled and extruded ammunition, as well as pigments and coatings. It is also used to block radiation in old television and computer screens, X-ray shielding aprons, and storage containers for nuclear waste.

There are two types of lead: organic and inorganic. Organic lead is less common and has different properties and health effects than inorganic lead. In British Columbia, exposure to organic lead is less of a concern because of the elimination of leaded gasoline. Inorganic lead means elemental lead and inorganic chemical compounds of lead and lead chromate. This publication only discusses inorganic lead exposure in the workplace.


## Lead process activities

---

Workers who are at most risk of high lead exposure include those who work in workplaces or industries where activities such as the following occur:

- Abrasive blasting of surfaces that contain lead.
- Applying electric arc, oxy-acetylene, oxy gas, plasma arc, or a flame for the purpose of welding, cutting, or cleaning the surface of any structure where lead coatings are present.
- Demolishing, removing, or encapsulating materials that contain lead. This includes work conducted by construction and hazardous materials abatement contractors.
- Dry sanding or scraping, grinding, cutting, or buffing surfaces that contain lead. This includes work conducted by building maintenance personnel (for example, stripping old lead paint from doors or windows).
- Using lead in a fire assay.
- Cleaning up lead contamination or equipment contaminated with lead (for example, lead dust collection systems and filters).

- Hot cutting of lead-containing materials in demolition, dismantling, or salvage operations.
- Manufacturing, assembling, handling, or repairing lead-acid storage batteries. This includes sorting, packing, and handling plates or other lead-containing parts that are removed or recovered from lead-acid storage batteries.
- Manufacturing, assembling, handling, testing, or firing of lead-containing weapons, detonators, or other explosives. This includes work performed by police and corrections officers.
- Mixing and blending lead in plastics, coatings, moulding powders, and stabilizers.
- Mixing and melting processes in the glass industry.
- Constructing, installing, altering, repairing, or renovating structures, substrates, mechanical or engineered systems, or parts of any of these that contain lead.
- Lead smelting, refining, alloying, melting, and casting.
- Spray-painting with lead-containing paints or coatings.
- Repairing radiators.
- Recycling or scrap-processing of materials that contain lead. This includes the recycling of cables as well as old televisions or computer monitors that contain cathode ray tubes (CRTs).
- Transporting, disposing of, or storing lead or materials containing lead.
- Using a power tool, high pressure waterjets, or other mechanical means to cut, sand, buff, or remove a surface coating that contains lead.

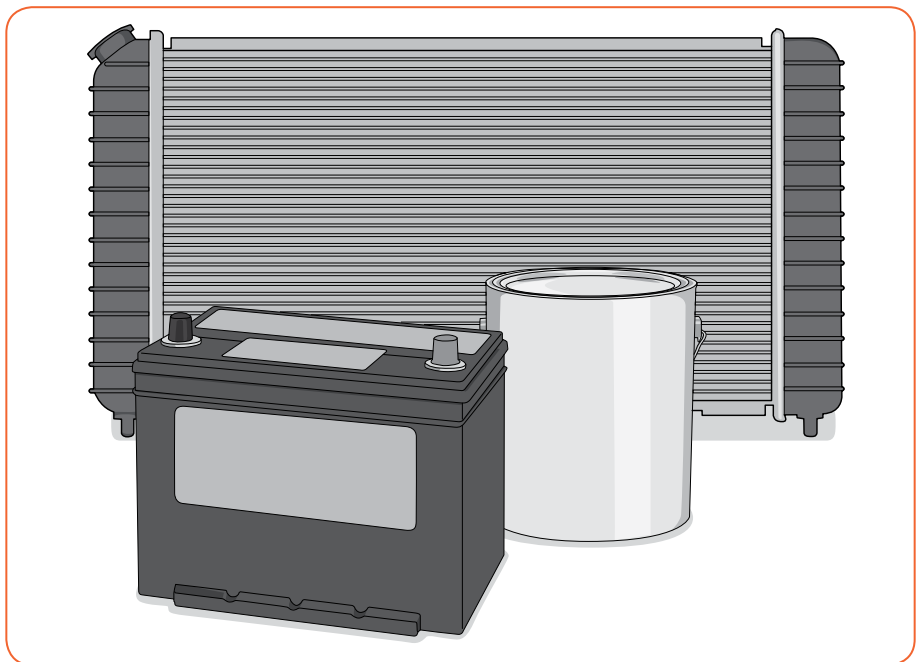

Radiators, batteries, and paints are some products that may contain lead.

Workers in plumbing, electronics, and printing may also be exposed to lead, but in much smaller quantities. Even workers who are not exposed to lead daily as part of their activities may be exposed to high levels of lead for short periods of time during maintenance, cleaning, and laundry duties.

### Lead-containing paints and coatings

Until the 1980s, lead was used in paint because it increased durability, made colours more vibrant, and helped paint dry faster. Lead-containing paint is still used for the yellow lane dividers on roads and highways, and there is no restriction on lead in industrial coatings. However, the federal Surface Coating Materials Regulations (SCMR) prohibit the advertising, sale, and importation of surface coating materials containing a lead concentration exceeding 90 mg/kg. (There are some exemptions listed in the SCMR.)

Family members of lead workers, particularly children and pregnant women, are at risk of lead exposure if lead dust is taken home on clothes, on footwear, on the skin, or in the hair.

Lead-containing paints and coatings do not present a hazard if they are left intact. The health risk occurs when they chip, peel, or are otherwise damaged. When lead-containing materials are disturbed (for example, scraped, sanded, or burned), lead dust, mist, or fumes can be released into the work environment and be inhaled or ingested by workers and other people, including children.



Don't take lead home.


# What are the health effects of lead exposure?

Everyone absorbs some lead from the food they eat and the air they breathe. However, if you are exposed to lead at work, it is more likely that you will have higher levels of lead in your body than the general public.

Lead enters your body when you breathe it in (inhalation) or when you swallow it (ingestion). Lead can enter your body if you:

- Breathe in lead dust or fumes.
- Drink or eat food contaminated with lead.
- Eat or drink from contaminated cups, plates, or bowls.
- Bite your nails or smoke when your fingers are contaminated with lead.
- Smoke or chew gum where there is lead dust or fumes.
- Put objects contaminated with lead in your mouth (such as pens and pencils from the work area).

Once lead is in your bloodstream, it is carried throughout the body and stored in various body tissues, mostly in the bones. The body can get rid of lead naturally over time. However, lead may build up or accumulate in your body if it enters your body faster than you can get rid of it.

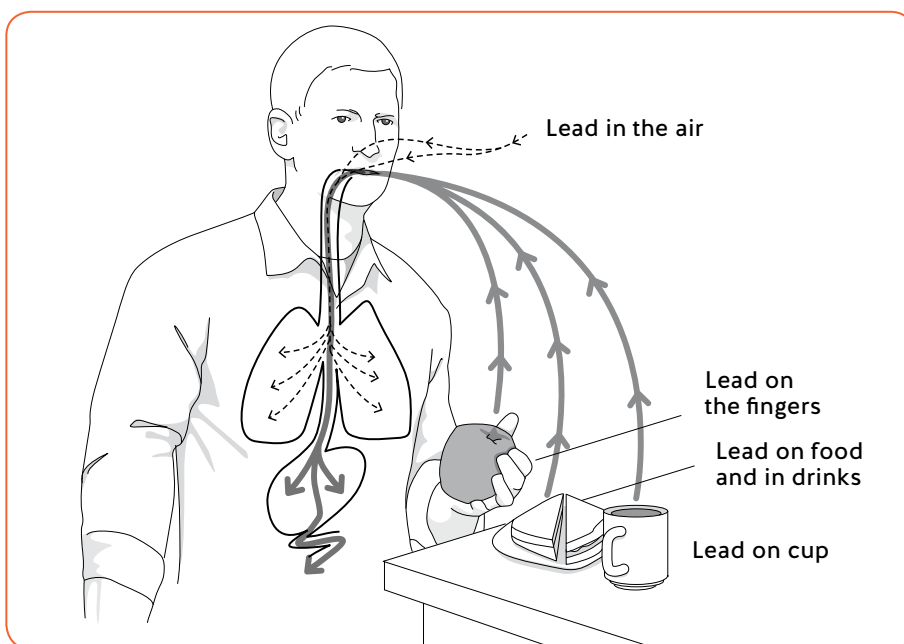

Lead gets into your body when you breathe in lead dust or fumes or when you swallow lead.

## Common signs and symptoms

---

Early signs and symptoms of high lead levels may include:

- Tiredness and weakness
- Headaches
- Lack of appetite
- A metallic taste

Later signs and symptoms may include:

- Abdominal aches or pains
- Constipation
- Muscle and joint aches and pains
- Memory problems

Signs and symptoms of lead exposure may take a long time to develop. Workers with similar exposures to lead may have different symptoms, which may also vary in severity. All workers need to prevent or minimize lead exposure.

## Possible health effects

---

Lead can affect the brain and nervous system, the reproductive system, the digestive system, the kidneys, and the body's ability to make blood. Lead is also a suspected human carcinogen and has been shown to cause cancer in laboratory animals. Possible effects of lead absorption include:

- Anemia
- Nerve damage causing muscle weakness
- Decrease in brain function (in children and adults)
- Kidney damage
- High blood pressure
- Reproductive effects in both men and women

There may also be adverse effects for a developing fetus (for example, low birth weight and developmental delays) when the mother is exposed to even fairly low levels of lead. If a woman has been exposed to a significant amount of lead before pregnancy, then during pregnancy lead may come out of the body tissues and enter the blood and the fetus. Lead is also excreted in breast milk.

Children are generally considered at higher risk than adults for health problems from lead exposure. In addition to the health problems suffered by adults, children may also have problems with mental and physical development.



## Measuring lead in the body

---

The amount of lead present in a person's body is measured using a blood test. The typical blood lead level for an adult is less than 0.1 micromoles per litre ( $\mu\text{mol/L}$ ), or 2 micrograms per decilitre ( $\mu\text{g/dL}$ ). Overt symptoms of lead poisoning in adults generally begin at blood levels between 2 and 4  $\mu\text{mol/L}$  (40 to 80  $\mu\text{g/dL}$ ). If a worker's blood lead level exceeds 0.48  $\mu\text{mol/L}$  (10  $\mu\text{g/dL}$ ), exposure should be minimized and protective measures improved. For more information, see the "Guide to health monitoring" (Appendix D).

# Industry terms and definitions

---

## **Coating**

Paint or a similar material that contains lead and forms a film when dry.

## **Containment**

An isolation system designed to effectively contain lead dust and debris within a designated work area where lead-containing materials are handled, removed, encapsulated, or enclosed.

## **Enclosure**

A physical barrier made of materials such as gyproc (gypsum wallboard), plywood, metal, or polyethylene (poly) sheeting used to separate lead-containing materials from the habitable environment.

## **Equivalent work operations**

Work operations closely matching the lead processes, types of materials, products or coatings, work practices, control measures, and environmental conditions at the employer's current workplace.

## **Hazard identification report**

A comprehensive document that determines the conditions or changing set of circumstances in a workplace that present a potential for injury, illness, or property damage, including any activities that could produce harmful consequences.

## **Health monitoring**

Part of a program that monitors and assesses individual workers through clinical medical examinations, by measuring and determining lead amounts in blood, and by other tests, to identify changes in a worker's health due to occupational exposure to lead.

## **HEPA filter**

Defined in the Regulation as a high-efficiency particulate air filter that is at least 99.97% efficient in collecting an aerosol particle 0.3 micrometre in size. When used for respiratory protection, HEPA filters are now referred to as *NIOSH 100 series filters*, or "100" filters for short.

## **Inorganic lead**

Elemental lead, inorganic compounds of lead and lead chromate, but does not include organic compounds of lead.

## Lead process

Work activities or processes that involve the manufacturing, processing, or handling of lead, or of materials, products, or coatings containing lead that may expose a worker to lead dust, fumes, or mist.

## Medical removal

The temporary removal of a worker from a work activity involving lead, if health monitoring indicates that the worker is at risk of adverse health effects from continued exposure to lead.

## Negative-air unit

A cabinet, usually portable, that contains a fan and one or more HEPA filters. Negative-air units are used to exhaust air from an enclosure, reducing the risk of contaminated air escaping into the workplace through a leak in the enclosure. Negative-air unit efficiency should be tested at least annually using a suitable indicator chemical, such as dioctyl phthalate (DOP) or polyalphaolefin (PAO) aerosols.

## NIOSH 100 series filter

A high-efficiency particulate air (HEPA) filter used for respiratory protection. These HEPA filters, called “100” filters for short, are at least 99.97% efficient in collecting an aerosol particle 0.3 micrometre in size. These filters carry an N, R, or P designation that specifies where and for how long the filter can be used (see Table 1).

**Table 1. NIOSH 100 series filter designations.**

Filter designation	For use in...	Time-use limitations
<b>N</b> = No oil	Oil-free atmospheres only (atmospheres containing no oil mist)	May be reused only after considering cleanliness, filter damage, and increased breathing resistance
<b>R</b> = Oil-resistant	Oily atmospheres	A single shift only (or eight hours of continuous or intermittent use)
<b>P</b> = Oil-proof	Oily atmospheres	Check the manufacturer’s specified time-use limitations for each P-type filter

**Practicable**

Defined in the Regulation as “that which is reasonably capable of being done.”

**Qualified person**

A person who has knowledge of work involving lead, the hazards of lead, and the means to control the hazards, by reason of education, training, and experience.

**Respirator**

A device worn to prevent the inhalation of hazardous airborne substances. There are two basic types of respirators: air-purifying and air-supplying.

**Risk assessment**

A comprehensive document, developed to select appropriate workplace controls, that evaluates the probability and degree of possible illness, injury, or death in a hazardous situation.

**Workers**

Includes supervisors, managers, as well as workers.

# Regulation requirements

---

This section outlines the key requirements in the Regulation that relate to lead exposure. In summary, the employer is responsible for protecting workers from exposure to lead dust, mist, and fumes by:

- Inspecting the site for any lead-containing materials that might be used during the work or disturbed before the work begins.
- Conducting a risk assessment to determine if workers are at risk of harmful exposure to lead.
- Preparing and implementing an exposure control plan (ECP) to protect their workers and any other workers that might be exposed to lead during the course of the work. The ECP must include safe work procedures.
- Preparing and implementing a respirator program if respirators are required.
- Sampling the air and surfaces for lead as required by the risk assessment and ECP.
- Submitting a Notice of Project for hazardous substances at least 48 hours before any lead work begins on a construction site.

The following sections and guidelines describe some of the regulatory requirements specific to dealing with lead.

## Sections 6.58.1–6.69, Lead

---

These sections describe specific requirements for workplace exposure to lead. Employers are responsible for the following:

- Having a risk assessment completed by a qualified person if workers are or may be exposed to lead dust, fumes, or mist.
- Developing and implementing an exposure control plan if workers are exposed to lead.
- Eliminating or controlling worker exposure by using materials that don't contain lead, or using a combination of engineering controls, administrative controls, and personal protective equipment to reduce lead exposure.
- Conducting air monitoring if workers are at risk of overexposure to airborne lead dust, fumes, or mist. Under the Regulation, employers can use objective monitoring data (collected during equivalent work operations through industry surveys or peer-reviewed or scientific studies) rather than conducting air monitoring.
- Posting warning signs at the boundaries of work areas where hazardous lead exposures could occur.

- Meeting the requirements for decontamination and personal hygiene listed in sections 5.82 to 5.84. If lead might contaminate exposed skin or clothing, employers must provide protective clothing and adequate wash facilities. These might include clothing lockers in separate rooms for street and work clothing, and heated shower facilities.
- Keeping work area surfaces free of lead dust as much as possible. Blowers, compressed air, or dry-sweeping cleaning methods must not be used.
- Instructing and training workers who are at risk of exposure to lead dust, mist, or fumes.
- Developing and implementing a health protection program (see “Health monitoring” on page 36) if workers are exposed to potentially hazardous levels of lead.
- Maintaining records of risk assessments, worker exposures, and worker training.

Employers engaged in primary lead smelting must keep airborne lead concentrations as low as reasonably achievable using the best available technology. These employers must also establish an acceptable health protection plan.

### **Guideline G6.60, Lead — Exposure control plan**

This guideline explains when an exposure control plan is required.

### **Guideline G6.61.1, Exception to monitoring requirements — Objective air monitoring data and associated record-keeping**

This guideline provides an example of how to comply with the requirements to rely on objective air monitoring data and to retain associated records.

### **Sections 5.48–5.59, Controlling exposure**

These sections describe general requirements for controlling exposure to various hazardous materials in the workplace. The sections cover the following topics:

- Exposure limits
- Workplace monitoring to assess exposure levels
- Monitoring methods acceptable to WorkSafeBC
- Exposure control plans
- Types of risk controls

- Designated hazardous substances
- Investigating symptoms of overexposure

The current 8-hour occupational exposure limit for lead (elemental and inorganic compounds, as lead) is 0.05 milligrams of lead per cubic metre of air (mg/m<sup>3</sup>).

### **Guideline G5.53-4, Occupational hygiene methods acceptable to WorkSafeBC**

This guideline provides information on publications that detail occupational hygiene methods (such as sampling and analytical methods) acceptable to WorkSafeBC.

### **Guideline G5.54-5, Health monitoring**

WorkSafeBC may require health monitoring for workers exposed to lead (or other substances) as part of an exposure control plan. This guideline describes the purpose of a health monitoring program and how it should be carried out. Health monitoring should be considered when:

- There is reasonable likelihood of a workplace exposure.
- The exposure can potentially cause an occupational disease or adverse health effect.
- There is a means of detecting or measuring the disease, the adverse health effect, or its precursor or biological indicator (such as lead in blood).

### **Section 12.115, Coatings on metals**

This section states that whenever practicable, lead coatings must be removed from metal before welding or cutting begins.

### **Section 20.2(1), Notice of project — Hazardous substances**

This section states that if a construction project will significantly disturb lead-containing material in buildings or structures, all employers responsible for the project and either the owner or prime contractor must ensure that WorkSafeBC receives a Notice of Project (NOP) at least 48 hours before the work begins (see page 49). For more information or to file an NOP form online, visit [worksafebc.com](http://worksafebc.com) and enter “Notice of Project” in the search box.

## Section 20.112, Hazardous materials

---

This section describes the requirements that employers and owners are responsible for before beginning work on the demolition or salvage of machinery, equipment, buildings, or structures. The employer and owner must:

- Ensure that a qualified person inspects the site to identify any lead that may be handled, disturbed, or removed.
- Have a written report of the inspection results available at the worksite.
- Ensure that a qualified person confirms in writing that the lead is safely contained or removed.



# Who is qualified to deal with lead?

---

Under the Regulation, *qualified* means “being knowledgeable of the work, the hazards involved and the means to control the hazards, by reason of education, training, experience or a combination thereof.”

When lead-containing materials may be present, a qualified person should be an occupational health and safety professional with occupational hygiene experience. These persons would include the following:

- A Certified Industrial Hygienist (CIH) or Registered Occupational Hygienist (ROH) with education and experience specific to lead management and work procedures
- A Registered Occupational Hygiene Technologist (ROHT), Certified Safety Professional (CSP), or Canadian Registered Safety Professional (CRSP) with education and experience specific to lead management and work procedures
- Individuals with other acceptable education, training, and experience, including recognized courses in lead inspection, management, and abatement, as well as extensive experience within the lead abatement industry

The following work must be performed by a qualified person:

- Conducting lead risk assessments
- Assessing the effectiveness of existing and planned control measures
- Developing an exposure control plan
- Developing safe work practices and procedures
- Selecting the appropriate personal protective equipment
- Evaluating worker exposure data, either from air monitoring, surface sampling, or objective air monitoring data (see page 25)

These assessments and procedures may be prepared by different qualified persons. For example, a third-party consultant may identify lead hazards, while the contractor may have the education, training, and experience to complete the risk assessment and work procedures. There must be no conflict between the hazard identification report and the risk assessment.



# Part 2 — Preventing lead exposure at work

---

# Who has responsibility for health and safety in the workplace?

---

Everyone in the workplace has health and safety responsibilities — including owners, employers, prime contractors, supervisors, and workers.

## Owners

---

Owners have the following responsibilities:

- Provide and maintain the land and premises that are being used as a workplace to ensure the health and safety of anyone at or near the workplace.
- Provide the employer or prime contractor at the workplace with information known to the owner that is necessary to identify the hazards, including lead.
- Comply with the relevant sections of the Regulation and the *Workers Compensation Act* (the Act), as well as any applicable orders.

## Employers

---

Employers have the following responsibilities:

- Ensure the health and safety of all workers at the worksite.
- Identify workplace hazards, and assess the risks of injury associated with those hazards.
- Conduct a risk assessment for lead exposure, develop an exposure control plan, write safe work procedures, and implement controls.
- Ensure that workers and supervisors are adequately instructed and trained.
- Keep written records of training (detailing who, what, and when).
- Establish and maintain an occupational health and safety program, including a written health and safety policy and a procedure for incident investigations.
- Support supervisors, safety coordinators, and workers in their health and safety activities.
- Take action immediately when a worker or supervisor tells you about a potentially hazardous situation.

## What is a prime contractor?

In a workplace with multiple employers, the *prime contractor* is the directing contractor, employer, or other person who enters into a written agreement with the owner of that workplace to be the prime contractor. If there is no such agreement, then the prime contractor is the owner of the workplace.

Reference: Section 118(1) of the *Workers Compensation Act*

- Initiate immediate investigations into incidents.
- Report exposure incidents to WorkSafeBC.
- Provide adequate first aid facilities and services.
- Provide and maintain personal protective equipment, clothing, and devices as required.
- Ensure that your workers follow the requirements of the Regulation and the Act, and that workers have access to these documents.

## Prime contractors

Prime contractors have the following responsibilities:

- Ensure the coordination of health and safety activities for employers, workers, and others at the workplace.
- Do everything that is reasonably practicable to establish and maintain a system or process that will ensure compliance with the relevant sections of the Regulation and the Act.

Each employer at a multiple-employer workplace must give the prime contractor the name of the person the employer has designated to supervise his or her workers.

## Supervisors

Supervisors have the following responsibilities:

- Instruct workers in safe work procedures.
- Ensure that workers are familiar with and follow the exposure control plan.
- Train workers for all tasks assigned to them, and regularly check that they are doing their work safely.
- Ensure that only authorized, adequately trained workers operate tools and equipment or use hazardous chemicals.
- Ensure that workers follow safe work procedures for handling, storing, and maintaining equipment and materials.
- Enforce health and safety requirements.
- Correct unsafe acts and conditions immediately.
- Identify workers with problems that could affect safety at the worksite, and follow up with interviews and referrals where necessary.
- Create health and safety rules, and inspect the workplace regularly for hazards.

## Workers

---

Workers have the following responsibilities:

- Know and follow the health and safety requirements that apply to your job.
- If you don't know how to do something safely, ask your supervisor for training before you begin work.
- Participate in all required health and safety education and training.
- Work safely, and encourage your co-workers to do the same.
- Use all required personal protective equipment and clothing.
- Correct any unsafe conditions or immediately report them to your supervisor.
- Immediately report any injury to a first aid attendant or supervisor.
- Inform your supervisor of any physical or mental impairments that may affect your ability to work safely.
- Make suggestions to improve health and safety.

## Consultants

---

Consultants:

- Should be occupational health and safety professionals with experience in the practice of occupational hygiene as it relates to lead management.
- Must follow accepted occupational hygiene practices, including those related to:
  - Collecting and identifying samples
  - Performing risk assessments
  - Developing safe work procedures
  - Implementing exposure control methods
- Should provide documentation in a reasonable time frame and clearly explain any results, conclusions, and recommendations to their clients.

# How do you assess the lead risk?

---

## Lead hazard identification

---

The presence of lead within a workplace is usually identified by sampling. A variety of sampling methods and devices can be used to measure the concentration of lead in the air, within a surface coating (for example, paint), dust, soil, or other materials. Lead testing must be conducted by a qualified person (see page 17) who will evaluate the lead hazard and determine the risk to workers. For more information on lead sampling methods and selecting a laboratory, see Appendix A.

The qualified person should consider taking the following actions to identify and assess lead hazards:

- Determine where and how lead is used in the workplace.
  - Where is lead present?
  - What tasks or products involve the use of lead?
  - Was there a previous source of contamination in the workplace?
  - How do workers come into contact with lead?
- Look at historical project records to see whether lead products (for example, lead-containing paint) were used in the workplace. For example, check project specifications, inspection reports, and safety data sheets (SDSs) from paint manufacturers.
- Conduct field tests. For example, use chemical spot tests or portable X-ray fluorescence analyzers to detect lead in suspected materials or on surfaces.
- Conduct laboratory tests to confirm field tests (for example, in cases where lead-containing paint is suspected but the field test does not indicate the presence of lead).

## Lead risk assessment

---

Once the qualified person has identified the lead hazards, the next step is to assess the risks associated with potential exposure to lead dust, mist, or fumes. When assessing risks, consider the work methods, procedures, or processes that may result in exposure. The potential for exposure will vary from workplace to workplace and will depend on work activities. In addition, consider which workers have a higher risk of exposure. Appropriate protective measures will vary according to the kinds of activities the workers perform.

The risk assessment must consider all of the following:

- The hazards of lead, including the exposure limit
- Information contained on labels or safety data sheets for any products that contain lead
- The hazard identification report, prepared by a qualified person, including the concentration of lead in the materials that will be used or disturbed
- The health effects of lead exposure
- The scope and nature of the work tasks involving the use or disturbance of lead, including:
  - The length of the workshift and any changes in shift length over the course of the project
  - Whether any “hot” work (welding, soldering, brazing, cutting, etc.) will take place
  - The potential routes of exposure to lead dust, fumes, or mist (airborne, from surfaces, or both)
  - The duration of worker exposure to lead
  - Any pre-existing air monitoring or surface monitoring data
  - Any pre-existing health monitoring data (for example, blood lead levels)
  - The potential effectiveness of existing or planned control measures
  - The presence of any vulnerable or unprotected workers near any activities that might generate lead dust, mist, or fumes

This list is not exhaustive, and the risk assessment must cover any other relevant information.

The risk assessment must be reviewed by a qualified person if any of the following apply:

- There is reason to believe the assessment is no longer valid.
- There has been a significant change to the scope, circumstances, or nature of the work activity.
- The results of any exposure monitoring or health monitoring show that a review is necessary.

## Exposure monitoring

Exposure monitoring includes sampling for airborne lead dust, mist, and fumes, as well as for dust on surfaces, in areas where workers are working or taking breaks. Surfaces should be sampled routinely, with the time interval depending on the duration and extent of the lead work. To make sure that the cleaning procedures are effective, wipe or vacuum samples may have to be collected every couple of days in “clean” areas on sites where extensive lead work is taking place.



The number of air samples required will depend on the nature of the work task and the scope of the lead work. These samples should consist of both area samples (collected near workstations or processes) and occupational samples collected directly on a worker. Samples should be collected:

- At the beginning of the project (during the first shift of the lead work activity)
- When establishing the effectiveness of workplace controls
- When there's a change in the work crew

If the work activity generates significant amounts of lead-containing dust (for example, abrasive blasting) or if the affected work area is large, more samples should be collected. All exposure monitoring should be conducted by a qualified person, and air monitoring data must be kept for at least 10 years.

### Objective air monitoring data

Air monitoring data is used to estimate the level of worker exposure to lead and to help select controls to reduce the exposure. Air monitoring on some worksites (for example, construction sites) may be challenging due to the changing nature of the work and the short duration of some tasks. By the time air sampling results are received, the work may have already been completed and the workers moved to another site.

In order to get exposure monitoring data (for example, for a risk assessment) under these circumstances, an employer may use previous air monitoring data. Alternatively, an employer may use objective air monitoring data gathered during equivalent work operations.

Equivalent work operations are activities that closely match the lead processes, types of materials, products or coatings, work practices, control measures, and environmental conditions that are present in the employer's current work operations.

Objective monitoring data is worker exposure data, collected during a variety of work activities, that is published in recognized scientific journals and industrial research sources. Much of this data has been validated (for example, peer-reviewed by a panel of experts), and there is high degree of confidence that it can be applied to other work operations. A qualified person may use this data, rather than collect his or her own samples, if the work conducted during the research is "equivalent" to the employer's work. This also applies to an employer's previous sampling data,

or to similar material from another employer, provided that the samples were collected by a qualified person using acceptable sampling methods.

When using any objective data to estimate worker exposure, the qualified person will be held to the same standard as he or she would be for the collection and interpretation of air sampling results. The qualified person must also be able to provide documentation and a rationale to justify the use of any existing objective data.

The control measures for working with lead paints and coatings, listed in Table 5 and the “Specific lead paint and coating removal operations” section of this book, were based on objective monitoring data obtained from reliable scientific sources. (For a partial list, see the References section on page 98.) Employers can use these control measures and respiratory protection recommendations, without performing any exposure monitoring, provided that both of the following apply:

- A risk assessment has been conducted by a qualified person.
- A qualified person has verified that the work activities are equivalent to those listed in the table and section describing lead paint and coating removal requirements.

Guideline 6.61.1 provides an example of how to comply with the requirement to rely on objective air monitoring data.

If an employer uses objective monitoring data to assess worker exposure, the source of the data, and/or the data itself, must be kept for at least 10 years.

## Lead on surfaces

Lead levels on surfaces can be used:

- As part of a risk assessment to establish the extent of contamination before a project begins
- To determine the effectiveness of workplace controls and the adequacy of housekeeping as lead is removed
- Along with a visual inspection, to help confirm that the lead hazard has been removed and the abatement project is complete

A number of agencies, including the U.S. Department of Housing and Urban Development (HUD) and the U.S. Environmental Protection Agency (EPA), have established clearance criteria for surfaces following lead abatement. These levels were originally

intended for residential settings, public housing, and locations frequented by children. Many jurisdictions in the U.S. and Canada have adopted these values (or derivatives of them) to protect the health of workers (including pregnant workers) and the general public, as well as children. However, some commercial and industrial buildings may have little or no association with children, so clearance criteria could take this into account.

Table 2 lists recommended criteria that should be considered for lead abatement projects or for areas that are determined to be “lead free,” such as eating areas. For more examples of lead clearance levels by jurisdiction, organization, or company, see Appendix B.

**Table 2. Recommended lead clearance criteria for surfaces.**

	Floor	Sill/ledge	Trough
Residences, schools, daycare centres, and other public buildings, or areas with vulnerable workers	0.43 mg/m <sup>2</sup> (40 µg/sq. ft.)	2.7 mg/m <sup>2</sup> (250 µg/sq. ft.)	4.3 mg/m <sup>2</sup> (400 µg/sq. ft.)
Commercial buildings, including retail stores, offices (administrative), and laboratories (other than lead assay laboratories)	2.2 mg/m <sup>2</sup> (200 µg/sq. ft.)	5.4 mg/m <sup>2</sup> (500 µg/sq. ft.)	8.6 mg/m <sup>2</sup> (800 µg/sq. ft.)

**Note:** Clean surfaces in eating areas, or other areas that are “lead free,” should not exceed 0.43 mg/m<sup>2</sup> (40 µg/sq. ft.) in any workplace.

# How do you prevent lead exposure at work?

---

This is the most important question of all, because health problems from lead exposure can be prevented. The solution is to minimize the amount of lead absorbed by your body. To control lead exposure, you must be aware of the work processes that create the risk, and put controls in place to reduce the exposure. In short, you need an exposure control plan.

## Substitution

---

The most effective way to eliminate lead hazards is to replace lead-containing materials with safe alternatives that contain less lead or no lead at all. Because lead is designated as a substance that is a possible human carcinogen and a possible reproductive toxin, employers must replace lead-containing materials whenever practicable. For example:

- Replace lead-containing paint with lead-free paint.
- Replace lead-based Babbitt metal with lead-free Babbitt metal (for example, a tin-based Babbitt metal).

Before substituting materials, ensure that the new material does not contain another product that is just as hazardous or more hazardous than lead. Check the safety data sheet (SDS) to help identify potentially hazardous components.

## Engineering controls

---

Engineering controls are physical changes to the way site-specific tasks are done (for example, modifying equipment or machinery) in order to eliminate or minimize the amount of lead contaminant being released into the atmosphere. Common engineering control measures include:

- Enclosing specific tasks or work processes that produce lead contamination (for example, a structure around a lead dust-generating demolition project)
- Installing local exhaust ventilation (for example, for welding, burning, or cutting)
- Installing dust collection systems, equipped with HEPA filters, on machines or equipment

- Modifying the process to reduce the amount of lead fumes or dust generated



Fence and warning sign on a lead removal site

## Containment (barriers and enclosures)

### Barriers

Barriers and enclosures can be used to separate the work area from adjacent areas. A barrier can be simply a rope or other divider that restricts access to the work area. However, barriers do not stop lead dust or other contaminants from leaving the work area. Enclosures are preferable to barriers because they contain lead dust within the work area. The isolation method used will depend upon the level of exposure risk and the scope and nature of the work.

If it's not practicable to use a partial or full enclosure, set up a barrier that leaves enough room for lead dust to settle before it drifts into adjacent work areas. Workers who enter an isolated area must wear appropriate respiratory protection and other protective equipment as required.

### Enclosures

Partial enclosures are the next level of defence. They isolate an area but will allow some emissions to get outside of the enclosure. Full enclosures are the safest method of isolation. A full enclosure is a tight enclosure that allows few or no emissions to get out of the isolated area.

Follow these guidelines for full enclosures:

- Use windproof materials that are impermeable to dust.
- Support the enclosure with a secure structure.
- Seal all joints in the enclosure.
- Use overlapping tarps or air locks for entrances.
- Use baffles, louvers, flat seals, and filters to keep dust within the enclosure.
- Use general mechanical ventilation to remove contaminated air.
- Equip air vents with appropriate filters.


Pre-manufactured (“pop-up”) enclosures are also available from several manufacturers.



Containment of a lead removal operation on a bridge



Entrance to a lead removal enclosure

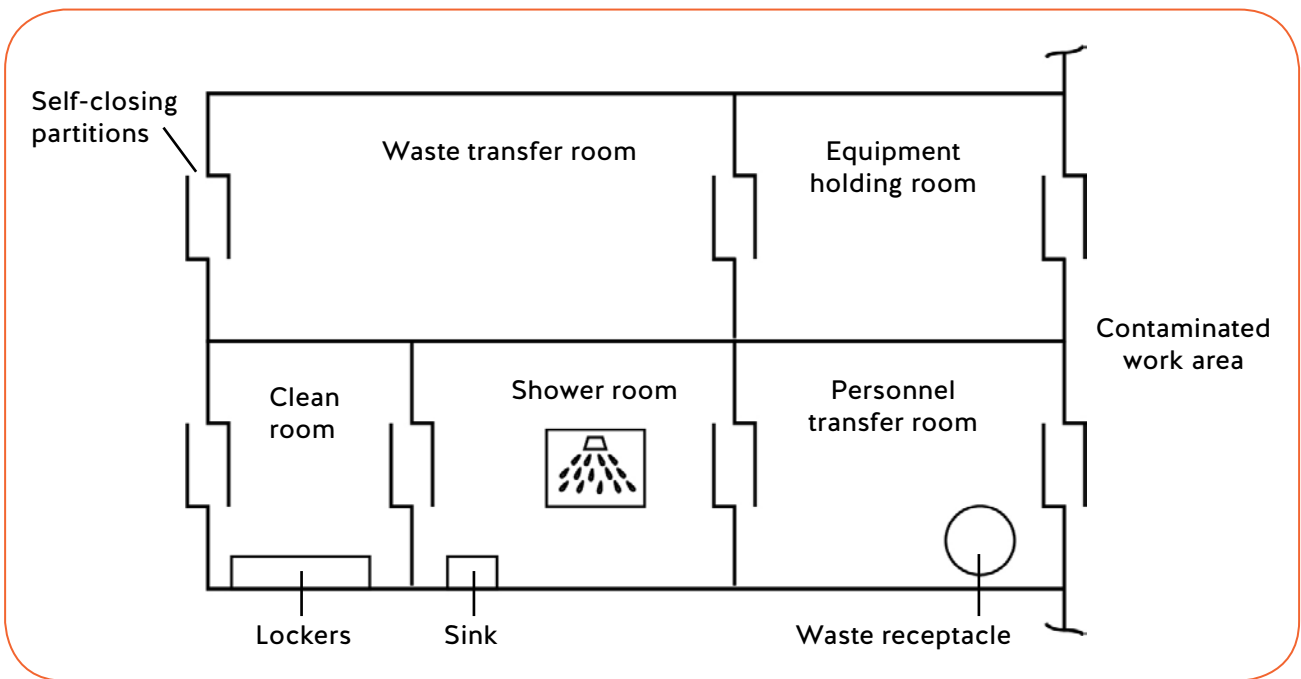

A full decontamination facility consists of a shower room and a series of connected rooms separated by air locks. The configuration may be altered depending on the size and shape or configuration of the work area.

## Work area containment ventilation

General mechanical ventilation is necessary for enclosed work areas. Ensure that exhaust air passes through a HEPA-filtered dust collector that is appropriate for lead dust as well as the volume and velocity of the air moving through the enclosure.


## Local exhaust ventilation

Local exhaust ventilation is useful for removing lead dust during dust-generating operations. For example, use local exhaust ventilation:

- For soldering, welding, burning, and high-temperature cutting of surfaces from which lead coatings have been removed (to control fumes from residual lead)
- When using power tools to remove lead-containing coatings
- When working with enclosed lead process operations

Follow these guidelines for local exhaust ventilation:

- Ensure that the air velocity in front of the extractor can overcome opposing air currents and capture contaminated air.
- Ensure that the air velocity at the source is at least 0.5 metres per second or 100 feet per minute. For some work activities (for example, welding or grinding), the capture velocity may have to be at least 1 m/s (200 ft./min.).
- Ensure that air discharged from the system passes through a HEPA filter and is exhausted so that contaminants cannot re-enter the workplace (for example, through a nearby air intake).
- Place the extractor in front of the worker and at or below the work surface. This draws air down and away from the worker's breathing zone.

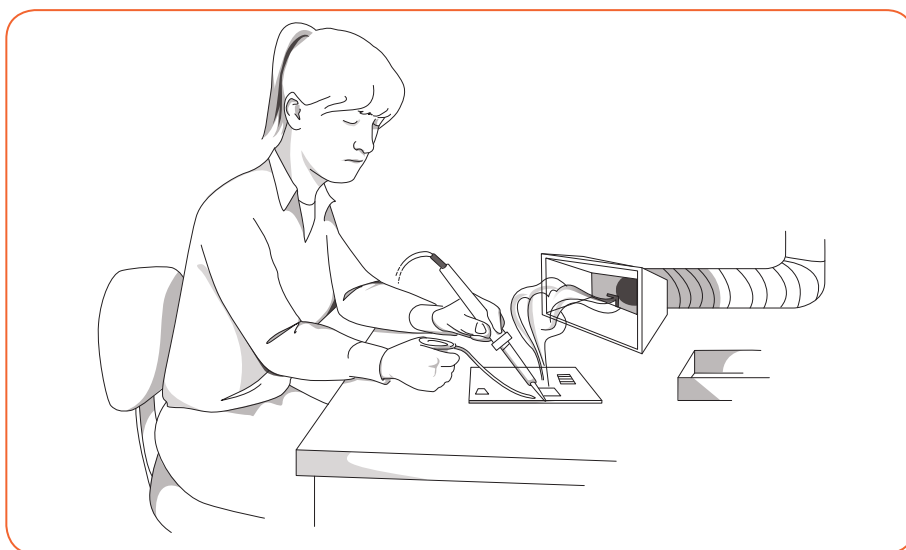

Ventilation should draw lead fumes or dust away from the work and the worker.



Some work operations may require enclosed and ventilated fume hoods.

### **Wet methods**

Wet methods can be effective techniques that literally put a damper on lead dust. Dust generation can be minimized by wetting surfaces, wet scraping, and wet shovelling. Water spray systems can be found on some common construction tools and equipment, including slurry or wet abrasive systems, hydro blast systems, and misting systems. Housekeeping and cleanup activities are critical when using wet methods and should be clearly described in the safe work procedures.



Grinder with a water attachment



Grinder with a HEPA exhaust attachment



## Administrative controls

---

Administrative controls are changes to the way work is organized and performed, including the scheduling of resources and staffing.

Administrative controls include:


- Good housekeeping
- Proper use of washing facilities
- Clean eating and drinking areas (separate from work areas)
- Worker education and training
- Safe work procedures
- Equipment maintenance
- Work scheduling
- Implementation of a health protection program

### Good housekeeping

- Use drop sheets below any lead operation that may produce lead dust or debris.
- Clean up lead dust and waste regularly, and seal it in a dust-tight container.
- Use a vacuum equipped with a HEPA filter to clean up dust and waste.
- Label or otherwise identify containers holding lead waste.
- Identify lead-containing materials or areas where lead is present with warning signs, labels, or other effective means.
- Before removing a container of lead waste from the work area, clean it with a damp cloth or a vacuum equipped with a HEPA filter.
- Inspect the work area at least once a day to ensure that it is clean.
- Do not use compressed air or dry sweeping to clean up lead dust or waste.

### Shower and change facilities

- Provide a room that workers can use to change into protective clothing and store contaminated protective clothing and equipment.
- Depending on the level of risk, provide a shower room (with warm water).
- Provide a room that workers can use to change into street clothes and store clean clothing and equipment.
- Provide washing facilities for workers to use before they eat, drink, smoke, or leave the worksite.

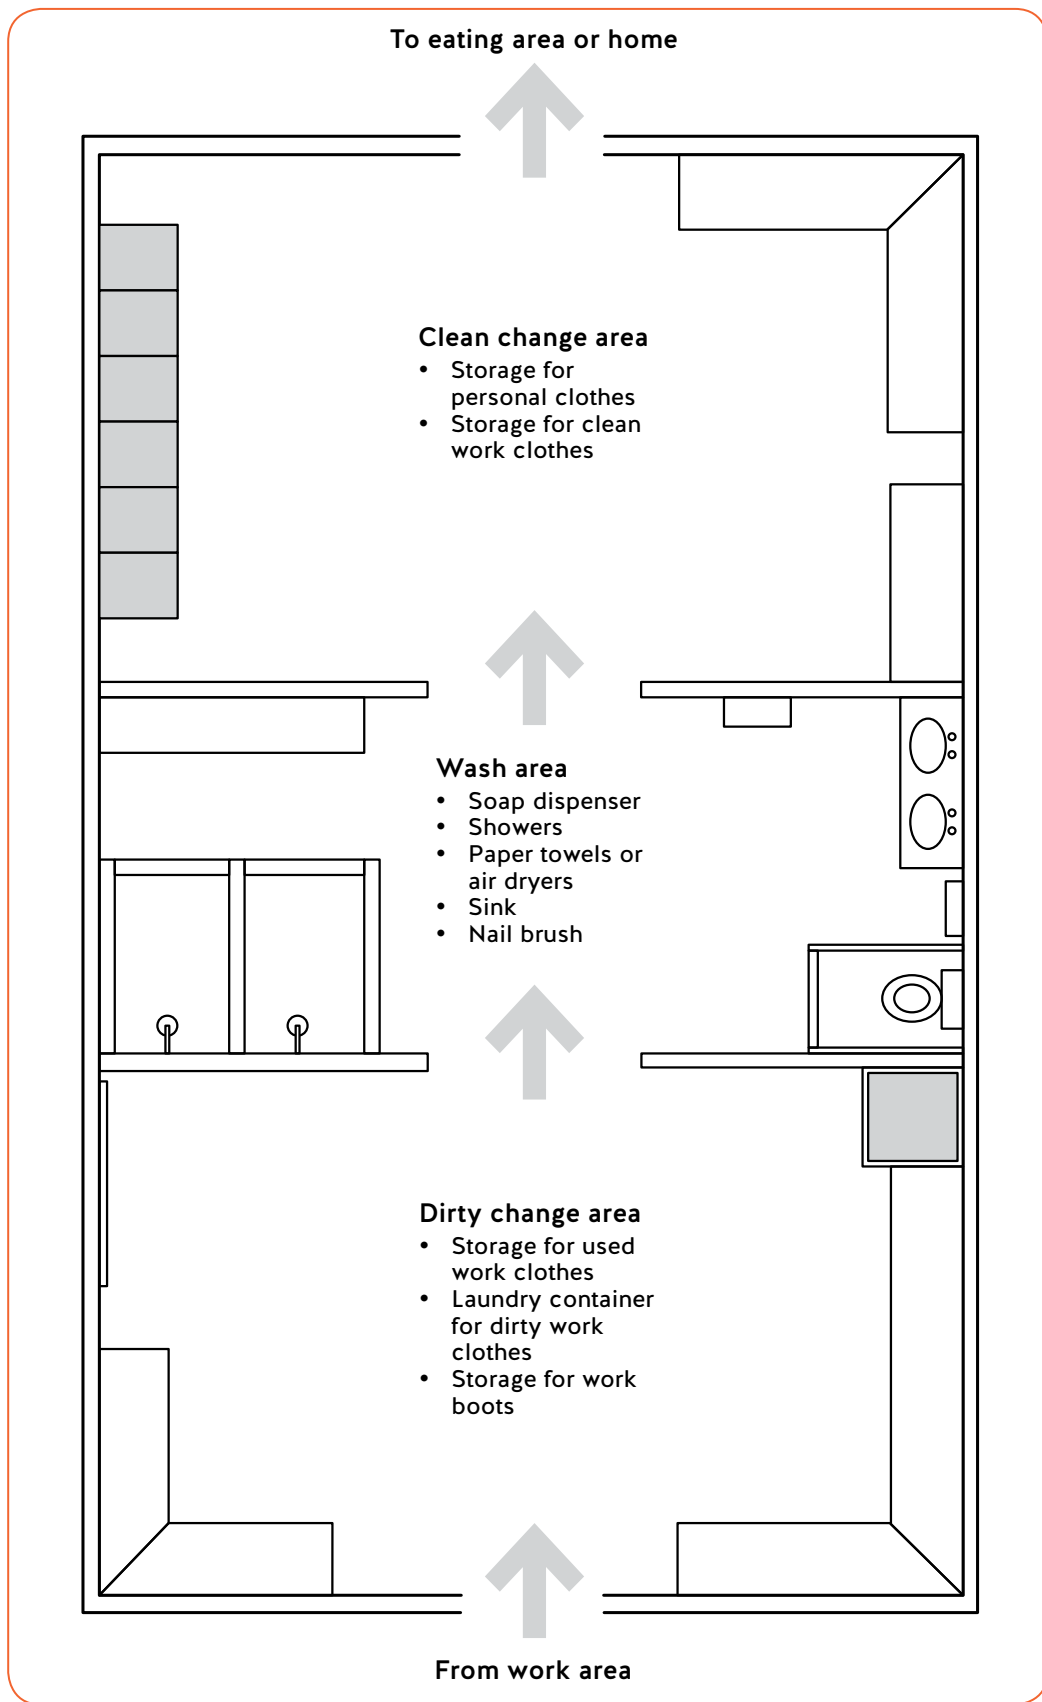

Properly designed change and wash areas ensure that lead contamination is removed before workers eat or go home.

## Eating facilities

- Provide designated eating facilities that are free from lead contamination.
- Do not eat, drink, smoke, or chew gum in the work area.

### Plan facilities carefully

In one work location, the washing facilities were at the bottom of a flight of stairs. Workers had to go down the stairs to wash up and then go back up the stairs to the lunch area. When the blood lead levels of the workers increased, it was discovered that the handrail was the major source of the lead contamination. The workers used the handrail as they went down the stairs before washing their hands, contaminating the handrail. They then used the handrail as they went up the stairs after washing their hands, contaminating their clean hands.

## Worker training

Employers must ensure that:

- Workers are informed of the health hazards of exposure to lead in the workplace.
- Workers are informed of the purpose and significance of workplace monitoring for lead in dust and air.
- Workers are trained and instructed in the safe handling, use, and disposal of any substances used in working with lead-containing materials.
- Workers are provided with safety data sheets (SDSs) for these substances.
- Workers are trained and instructed in the correct operation and use of any required engineering controls (such as local exhaust ventilation systems).
- Workers can demonstrate competency in doing their work according to the safe work procedures.
- Workers are informed of the purpose and significance of any health monitoring programs.

For information on educating and training workers in the safe use of hazardous products, see the WorkSafeBC publication *WHMIS 2015: At Work*.

## Safe work procedures

Employers should develop and implement safe work procedures for activities where workers are or may be exposed to lead. For example, coatings and metals should be checked for lead before starting activities such as welding, grinding, and drilling. Lead Babbitt pots should be checked so that they are maintained at proper temperatures to minimize lead fumes. In addition, some activities require detailed, step-by-step safe work procedures on

how to perform the work safely. For example, if lead is found in a coating, a detailed safe work procedure on how to remove the coating is required before work begins.

### **Equipment maintenance**

Employers and workers need to work together to ensure all equipment is working properly, especially exhaust ventilation systems that remove lead fumes and dust. Workers should report equipment problems and failures immediately.

### **Work schedules**

The amount of time a worker is exposed to lead can be reduced through job rotation and varied work assignments. Such changes in work schedules will limit the amount of lead absorbed and allow the body time to naturally get rid of lead that has been absorbed. Also, work activities involving high lead levels can be scheduled in areas where and during times when fewer workers would be exposed.

### **Health monitoring**

Health monitoring can be used to evaluate the effectiveness of workplace controls. A health monitoring program may be required if:

- Recommended by a risk assessment.
- The removal project has a long duration (for example, weeks rather than days).
- The lead concentration of an affected surface material is high (for example, greater than 1% or 10,000 ppm lead).
- The work processes can generate large amounts of lead dust, mist, or fumes.
- Ordered by a WorkSafeBC occupational hygiene officer.

The purpose of health monitoring is to determine the following:

- Whether a worker has absorbed significant amounts of lead
- How or why the exposure took place
- What changes must be made to the work controls to reduce the exposure

A typical lead health monitoring program consists of the following:

- Pre-project medical examinations
- Periodic medical examinations conducted during the course of the project
- Clinical testing (usually the collection of blood samples)
- Worker education
- Record keeping

The concentration of lead in a worker's blood is a good indication of the amount of lead absorbed by the body during work activities. The results can be used to determine whether a worker should be removed from the lead exposure or remain on the project with limitations. If workers show signs or symptoms of lead exposure, they should immediately be removed from the project and referred to a physician. The ultimate determination of a worker's fitness to remain on a lead project should be made only by a physician.

For more information on health monitoring, refer to the "Guide to health monitoring" (Appendix D).

## Personal protective equipment (PPE)

All workers entering an area containing a lead hazard should wear the appropriate personal protective equipment (PPE). PPE should be the last line of defence in a health and safety program. It may be used as a control if other controls are not practicable, or in addition to other controls. Before considering PPE, first try to eliminate or minimize the risks using other means. Follow these guidelines when using PPE to prevent exposure to lead:

- Provide workers with appropriate respirators to remove contaminants from the air, and ensure that they use them according to their training.
- Ensure that workers use protective clothing to prevent skin contact with lead contaminant.

### Protective work clothing

The use of disposable protective clothing is recommended.

Workers should wear protective clothing that:

- Is made of a material that resists penetration by lead dust
- Covers the body and fits snugly at the neck, wrists, and ankles
- Covers the head
- Covers the feet
- Can be immediately repaired or replaced if torn

When working around lead, workers often have to wear protective clothing in confined spaces where there is not a lot of air movement. As a result, these workers may be at a higher risk of experiencing heat stress and resulting heat-related disorders. For more information, see the WorkSafeBC publication *Preventing Heat Stress at Work*.

Even with other control measures, coveralls are usually worn. Coveralls prevent lead from collecting on personal clothing and workers' bodies. However, to be effective, coveralls must be properly done up, have no missing buttons, be repaired when holes develop, and be kept clean. Coveralls must be washed regularly (with the frequency of washing determined by the level of lead exposure). Disposable coveralls should be used where possible.

Lead-contaminated clothing should be washed separately from other clothing. Work clothes and boots should not be taken home. Commercial laundry services used to wash lead-contaminated clothing need to be informed that the clothing is contaminated with lead and requires special precautions. The clothing should be placed in heavy-duty plastic bags and labelled "lead-contaminated clothing."

### **Respiratory protection**

If respiratory protection is required, employers must select appropriate respirators based on the anticipated work activities and establish a respirator program. (For more information on respirator programs, see page 46.) The types of respirators used should be based on the size of the work area, the nature of the lead process, and the duration of the work. More protection would be required if a greater amount of lead is potentially disturbed.

The respirator choices shown in Table 3 are determined by maximum use concentrations as detailed in section 8.34 of the Regulation. As the lead concentration approaches the maximum use concentration for the respirator being used, workers must switch to a respirator with a higher protection factor.

**Table 3. Respiratory protection choices for different maximum use concentrations of lead.**

Lead concentration	Air-purifying respirators	Air-supplying respirators
Up to 0.5 mg/m <sup>3</sup>	<ul style="list-style-type: none"> <li>• Single-use half-face respirator (e.g., N95/N99)</li> <li>• Half-facepiece respirator with P100 (HEPA) filters</li> </ul>	—
Up to 1.25 mg/m <sup>3</sup>	<ul style="list-style-type: none"> <li>• Loose-fitting hood/facepiece, powered respirator with P100 (HEPA) filters</li> </ul>	—
Up to 2.5 mg/m <sup>3</sup>	<ul style="list-style-type: none"> <li>• Full-facepiece respirator with P100 (HEPA) filters</li> </ul>	<ul style="list-style-type: none"> <li>• Airline: demand (negative-pressure) full-facepiece respirator</li> </ul>
Up to 50 mg/m <sup>3</sup>	<ul style="list-style-type: none"> <li>• Powered full-facepiece respirator (PAPR) with P100 (HEPA) filters</li> </ul>	<ul style="list-style-type: none"> <li>• Airline: continuous-flow full-facepiece or helmet/hood respirator</li> <li>• Airline: pressure-demand (positive-pressure) full-facepiece respirator</li> </ul>
Up to 500 mg/m <sup>3</sup>	—	<ul style="list-style-type: none"> <li>• Self-contained breathing apparatus (SCBA): pressure-demand (positive-pressure) respirator</li> </ul>



Single-use N95 respirator



Half-facepiece elastomeric respirator with HEPA cartridges



Full-facepiece elastomeric respirator with HEPA cartridges

# What is an exposure control plan?

---

Employers are required to develop and implement an exposure control plan to minimize worker exposure to lead if:

- Workers are or may be exposed to airborne particulate that contains lead.
- Worker exposure through any route of entry could cause elevated blood levels.

Lead is an ALARA substance, which means that worker exposure must be kept as low as reasonably achievable.

Written exposure control plans explain the work procedures and other controls that will be used to reduce workers' risk of lead exposure. Exposure control plans must detail steps to eliminate risk, or to control and reduce risk, by either:

- Substituting with safer materials where feasible, or
- Using engineering controls, administrative controls, and personal protective equipment (PPE)

Strict adherence to the ALARA principle (see page 1), as well as to exposure limits and appropriate respiratory and skin protection, are essential elements of exposure control plans. An employer must also ensure that a qualified person (see page 17) performs a formal risk assessment to determine which workers may be exposed to lead contaminants, and the extent of any exposure. Risk assessment applies not only to the lead itself but also to the methods used to remove or handle it.

## Who needs an exposure control plan for lead?

---

Exposure control plans may be required by many employers, including the following:

- Lead smelters and refineries
- Radiator repair shops
- Manufacturers of products containing lead (for example, paints, plastics, and ceramics)
- Recycling facilities (batteries, painted wood, and scrap metal)
- Construction and demolition contractors
- Lead abatement contractors
- Hazardous materials consultants
- School district maintenance facilities
- Commercial building management agencies
- Painters and welders

### In the Regulation

For more information on exposure control plans and exposure limits, see sections 5.48–5.59.

For more information on requirements for lead, see sections 6.58.1–6.69.



## Elements of an exposure control plan

---

Every workplace is unique, so as an employer, you need to develop an exposure control plan that is specific to your workplace. Exposure control plans should be developed only by a qualified person.

Your exposure control plan must include the following:

- A statement of purpose
- The responsibilities of employers, supervisors, and workers
- Risk identification and assessment
- Risk controls
- Written safe work procedures
- Worker education and training
- Written records
- Hygiene facilities and decontamination procedures
- Health monitoring

### **Statement of purpose**

The purpose of an exposure control plan is to prevent harmful exposure of workers to chemicals (including lead) in the workplace. The following is an example of a typical statement of purpose:

[Name of employer] is committed to providing a safe and healthy workplace for all of our workers. A combination of measures will be used to achieve this objective, including the most effective control technologies available. Our work procedures will protect not only our workers but also any other workers who enter our workplace. All workers must follow the procedures described in this plan to prevent or reduce exposure to lead-containing materials.

### **Responsibilities of employers, supervisors, and workers**

#### ***Employers***

Employers have the following responsibilities:

- Ensure that the resources (for example, safe work procedures, worker training, and PPE) required to implement and maintain the exposure control plan are readily available where and when they are required.
- Select, implement, and document the appropriate site-specific control measures.
- Ensure that supervisors and workers are educated and trained to an acceptable level of competency.
- Ensure that workers use appropriate PPE (for example, disposable coveralls, eye protection, and respirators).

- Conduct a periodic review of the plan's effectiveness. This includes a review of the available control technologies to ensure that these are selected and used when practical.
- Maintain records of training and inspections.
- Ensure that a copy of the exposure control plan is available to workers.

### ***Supervisors***

Supervisors have the following responsibilities:

- Ensure that workers are adequately instructed on the workplace controls.
- Ensure that workers use appropriate PPE.
- If workers require respirators, ensure that they have been fit-tested and that the results are recorded.
- Direct work in a manner that eliminates or minimizes the risk to workers.

### ***Workers***

Workers have the following responsibilities:

- Know the hazards of the workplace.
- Follow established safe work procedures as directed by the employer or supervisor.
- Use any required PPE as instructed.
- Report any unsafe conditions or acts to the supervisor.
- Know how and when to report exposure incidents.

## **Hazard identification and risk assessment**

Employers must ensure that potential workplace hazards are identified and that the risks associated with those hazards are assessed. If there may be lead-containing materials at the worksite that will be disturbed, the employer will need to do the following before work begins:

- Conduct a lead survey to identify potential hazards.
- Assess the risks associated with those hazards.
- Control the risks by eliminating or minimizing them.

For more information, see “How do you assess the lead risk?” on pages 23 to 27.

## **Exposure limit**

The 8-hour occupational exposure limit for airborne lead is 0.05 mg/m<sup>3</sup>. As lead is a suspected human carcinogen, the ALARA principle also applies, and workplace exposure must be reduced to levels as low as reasonably achievable below the exposure limit.

## **Risk controls**

Risk controls are measures that are used to eliminate the risk to workers or, if elimination is not possible, minimize the risk.

### *Hierarchy of controls*

Some types of controls are more effective than others, but it may not always be practicable to use the more effective solution. Whenever possible, however, controls must be implemented in the following order of preference:

1. Substitute less hazardous materials or processes (for example, replace lead-containing paints with paints that do not contain lead).
2. Use engineering controls, such as a containment system (for example, barriers and enclosures) and local exhaust ventilation.
3. Use administrative controls, such as work scheduling (limiting the shift time for workers exposed to lead), proper use of washing facilities, and setting up a blood monitoring program.
4. Use PPE. PPE is considered the last line of defence and should be used only when other controls are not practicable, or in addition to other controls. The proper use, fit, and disposal of PPE must also be considered.

Workplace controls must be based on a risk assessment conducted by a qualified person.

## **Written safe work procedures**

Written safe work procedures describe how to carry out specific tasks safely and efficiently. In general, safe work procedures are written for:

- Hazardous tasks
- Complicated tasks, so that important steps don't get missed
- Frequently performed tasks
- Less routine tasks, to remind workers of the hazards and how to control the risks

Written safe work procedures must be task specific and include any required PPE, when it must be used, and where it can be found. Post the procedures where they will be available to workers.

### *How to develop a written safe work procedure*

Follow these five steps when developing written safe work procedures:

1. Determine the overall task for which the safe work procedure is needed.
2. Break down the task into its basic steps.
3. Identify the hazards associated with each step.

4. Identify the actions needed to minimize the risks to workers from these hazards.
5. Prepare a list of the actions that workers must do when performing the task.

### **Hygiene facilities and decontamination procedures**

Employers must also provide adequate work procedures and washing facilities to help control lead exposure, including:

- Good housekeeping procedures, including end-of-workday procedures
- Washing facilities
- Shower facilities as required
- Separate “clean” and “dirty” changing areas
- Clean eating and drinking facilities

### ***Recommended practices when working with lead***

- Workers should change from street clothes to work clothes (including footwear) at the beginning of their workshift.
- Street clothes should be kept separate from work clothes.
- Where possible, washing and shower facilities should be located between the storage and changing areas for dirty protective clothing and footwear and for clean protective and personal clothing.
- Workers should remove contaminated outer work clothing and thoroughly wash their hands and faces before eating, drinking, or smoking.
- No eating, drinking, smoking, chewing gum, or nail-biting should be allowed in the work area.
- No food, gum, cigarettes, or other personal items should be stored in the work area.
- Coffee and lunch breaks should be taken in a clean area separate from the work area.
- Workers should remove all work clothes and shoes at the end of the workday and leave them at work.
- Workers should wash or shower before leaving work to ensure that any potential contamination (for example, on their hair) is removed before they go home.
- Workers should not take any contaminated items home, as this may expose family members to lead.
- Workers who launder contaminated work clothes should be educated about the potential health effects of lead, routes of exposure to lead, and control measures to reduce such exposure.
- The work area should be kept clean, and workers should use cleaning methods that minimize the generation of dust, such as wet dusting, wet sweeping, or vacuuming using a HEPA-filtered vacuum.

## **Worker education and training**

Employers must ensure that workers are informed about the contents of the exposure control plan, and that they are educated and trained to work safely. Exposure control plans should describe worker education and training, and how they will be carried out. Education and training are particularly important for new workers.

## **Written records**

The exposure control plan must be written down, and records must be kept for each component of the plan. For example, document education and training activities — keep track of who was trained, when the training took place, and what it included.

Other documentation should include the following:

- Risk assessments
- Workplace inspections
- Air monitoring results (must be kept for at least 10 years)
- Incident investigation reports
- Health monitoring records

## **Health monitoring**

An exposure control plan for lead might require medical monitoring (for example, blood testing) of workers who will be working with or around lead-containing materials. For more information, see “Health monitoring” beginning on page 36 and the “Guide to health monitoring” (Appendix D) on page 92.

## **Reviewing the plan**

Review the exposure control plan at least once a year, and update it as necessary. During this process, consult with the joint health and safety committee (or the worker health and safety representative, if applicable).

# What is a respirator program?

---

A respirator program is a formal plan for using respirators at a specific worksite. If respirators are required as part of an exposure control plan and used at a workplace, a respirator program must be in place. You cannot simply hand out respirators and expect workers to use them properly.

Ideally, one person in the organization should be designated as the program administrator and have overall responsibility for the program. Parts of the program can be delegated to others, but the final authority for running the program should rest with one administrator. It is important that whoever is assigned the responsibility for respirators has the knowledge to perform the job.

## Elements of a respirator program

---

The Regulation lists six essential elements of a respirator program:

- A statement of purpose and responsibilities
- Written procedures for selection, use, inspection, cleaning, maintenance, and storage of respirators
- Instruction and training
- Medical assessment of respirator wearers, where required
- Documentation
- Program review

For more information on respirators and respirator programs, see the WorkSafeBC publication *Breathe Safer*.

## Fit testing

---

Fit testing is performed to make sure that respirators fit properly and that contaminants in the air cannot leak into the respirator. Testing must be done when a worker is first fitted with a respirator and once a year after that.

When fit tests are performed, workers must be clean-shaven if using a respirator that requires a seal with the face. Workers must also wear all other personal protective equipment that they might need (such as safety glasses and hard hats). The earpieces of prescription eyeglasses must not interfere with the seal of full-facepiece respirators. (Specialty lens holders are available from mask manufacturers.)

Two types of fit testing may be performed: qualitative fit testing and quantitative fit testing.

### In the Regulation

For more information about the requirements for fit testing, see sections 8.39–8.41.

### Qualitative fit testing

In qualitative fit testing, a test agent is used to determine whether a worker has a properly sealing facepiece. The agent is introduced into a hood placed on the worker's head. If the worker can detect an irritant smell or taste (depending on the agent used) through the respirator, the respirator fails the fit test.



Fit testing for a single-use respirator using a special hood

### Quantitative fit testing

In quantitative fit testing, specialized equipment is used to measure the actual amount of test agent, or ambient particulates, leaking into the facepiece. The concentration inside the facepiece is compared with the concentration outside the facepiece to determine the level of protection provided by the respirator.

Procedures for both qualitative and quantitative fit testing must be performed in accordance with CSA Standard CAN/CSA-Z94.4-02.

### Seal checking

Seal checking is performed whenever a worker puts on a tight-fitting respirator. Before any seal check is done, the respirator should be inspected to ensure that the facepiece and straps are intact and that the inlet and exhaust valves are in good condition and lie flat.

For example, negative-pressure and positive-pressure seal checks for a half-facepiece elastomeric respirator are performed as follows:

1. Put on the respirator and tighten the straps until the respirator feels snug but comfortable.
2. To perform a negative-pressure seal check, close off the openings of the cartridges by covering them with the hands, then breathe in slightly to create a vacuum. Hold for about 10 seconds. If the seal is good, the facepiece should collapse slightly and stay collapsed. No air should leak in from around the seal.
3. To perform a positive-pressure seal check, close off the exhaust valve with a hand, then breathe out slightly to force air into the facepiece. Hold for about 10 seconds. If the seal is good, the facepiece should bulge and stay out. No air should leak out from around the seal.
4. If there is an air leak, check the inhalation and exhalation valves, reposition the respirator, and readjust the head straps. Repeat the seal checks until the respirator passes.



Negative-pressure seal check for a half-facepiece elastomeric respirator



Positive-pressure seal check



# Do you need to submit a Notice of Project (NOP)?

---

All employers and either the owner or prime contractor, responsible for a lead work activity on a construction project, must ensure that WorkSafeBC receives a Notice of Project — Hazardous Substances at least 48 hours before the work activity begins. This requirement is set out in section 20.2(1) of the Regulation.

A lead work activity is any work that significantly disturbs lead-containing material in buildings or structures. That is, the work activity could generate lead dust, fumes, or mist in the air or on surfaces, and these contaminants:

- May cause harm (for example, a risk of occupational disease) to a worker, and/or
- Require the use of specialized controls (for example, respirators)

Workers are at significant risk of harm if:

- They breathe airborne lead dust, mist, or fumes at levels at or above the action limit — one-half of the occupational exposure limit. (Section 5.54 of the Regulation requires that an employer implement an exposure control plan if workers are exposed to an air contaminant greater than 50% of the exposure limit.)
- Their hands and faces are so contaminated with lead that there is a risk the lead could be ingested.
- They breathe or ingest enough lead to increase their lead body burden above background levels (0.1 micromoles per litre [ $\mu\text{mol/L}$ ], or 2 micrograms per decilitre [ $\mu\text{g/dL}$ ]).

Some work activities that are not expected to cause harm would not normally require an NOP form to be submitted. Examples include the following:

- Conducting a site inspection to identify hazardous materials
- Collecting samples and preparing a written report under section 20.112 of the Regulation
- Determining the types of tasks required for the construction project
- Estimating the cost of labour and materials for the project
- Low-risk and some low-moderate- and moderate-risk work activities (see Table 5) that should not increase a worker's lead body burden. Examples include the following:
  - Light sanding or scraping a small area of lead-containing paint
  - Applying lead-containing paint with a brush or roller

- Installing or removing sheet metal that contains lead
- Installing or removing bolts or screws covered with lead-containing paint
- Operating an excavator (within the cab) during building demolition
- Transporting sealed containers of lead waste
- Cleaning up small areas of lead-containing dust or debris

The completed NOP form must include the following information:

- The names and contact information of all employers responsible for the work activity
- The address or location of the construction project
- The scope of the project
- The starting date and estimated duration of the project
- Safe work procedures specific to the work activities that involve lead
- The hazard identification report required by section 20.112, if applicable

A copy of the completed NOP form must be posted at the worksite before the lead work activity begins and kept posted for the duration of the project. If more time is needed, an amendment must be filed.

If the work needs to be done immediately, as in the case of emergency repair or cleanup, work may start immediately, but the NOP must be filed as soon as possible afterwards. Every reasonable effort must be made to contact the local WorkSafeBC office if the NOP cannot be filed before the work starts.

# How do you test and dispose of lead waste?

---

When lead-containing materials (such as paints) are identified and require removal, the waste must be safely disposed of.

- Avoid carrying waste that contains lead through an occupied space. Lead waste must be removed using means that prevent the spread of lead dust. Place lead waste in properly marked, heavy-duty plastic bags or plastic or steel drums.
- If a dumpster is used, it must be covered at all times. If a chute is used, it should also be covered (or use a barrel chute).
- All waste should be stored in a secured container until disposal.
- Waste should not be transported in an open truck unless the container or truck bed is sealed.
- Water used for cleanup or for removal of lead-containing coatings (for example, through pressure washing or hydro blasting) should not be poured into a sink or tub, on the ground, or into a storm drain.

All lead-containing waste materials must be sampled and analyzed using the standard Toxicity Characteristic Leaching Procedure (TCLP). This procedure is designed to determine the “mobility” or “leachability” of lead in liquid and solid wastes.

A minimum of 50 g (100 g is preferred) of a representative lead-containing paint and associated substrate (concrete, plaster, etc.) should be collected and submitted to a certified laboratory for testing. Laboratory results are provided in milligrams per litre (mg/L) of leachable lead. The acceptable level for non-regulated disposal of lead-containing paint is less than 5 mg/L as determined through analytical TCLP. The disposal of lead-containing paint is regulated under the federal *Transportation of Dangerous Goods Act* and by the British Columbia Ministry of Environment.

# How do you prepare for emergencies?

---

If a risk assessment determines that there may be a need to rescue or evacuate workers, employers must prepare a written emergency plan for each individual worksite. This plan must include written procedures for evacuating workers from the contaminated work area in the event of a medical emergency. Employers must develop these procedures in consultation with emergency response agencies such as ambulance and fire departments. Employers must also assign a worker (such as an occupational first aid attendant) to coordinate the implementation of the procedures.

As soon as a written emergency plan is developed, the employer must do the following:

- Conduct emergency drills to determine whether the procedures work in practice and to thoroughly familiarize workers with their roles in an actual emergency.
- Keep records of emergency drills to monitor efficiency.
- Provide each worker with a copy of the plan, and provide enough training to ensure that workers clearly understand the procedures.
- Post the procedures and other relevant information (such as telephone numbers) in appropriate, conspicuous locations.

## Medical emergency procedures

---

If a medical emergency occurs in a lead-containing work area as a result of an incident or collapse, standard protective measures may be temporarily ignored if they would otherwise cause an immediate threat to the worker's life or recovery. For example, a worker's respirator may be immediately removed so that mouth-to-mouth resuscitation can be performed, or a worker's contaminated clothing may be left on if a spinal injury is suspected.

If protective equipment and clothing can be left in place without interfering with the emergency care of the injured worker in a contaminated area, they should not be removed until the worker has been brought to an uncontaminated area. On-site decontamination procedures should be carried out only if they do not interfere with medical emergency procedures.

When first aid, ambulance, or other emergency personnel have to enter a contaminated area, they must be warned of the hazard and be provided with, and told how to use, respirators, coveralls, and

other PPE before entering the area. (In view of the hazard, some emergency responders may refuse to enter the contaminated area.)

Employers must ensure that emergency procedures and preparations provide emergency personnel with clear instructions, provisions, and the means to adequately decontaminate or clean up themselves and the injured worker before leaving the worksite. For example, first aid or ambulance personnel accompanying an injured worker can remove contaminated equipment and clothing in the equipment holding room to minimize the risk of contaminating other areas outside the containment area.

Injured workers who have not been decontaminated must be covered in such a way as to minimize contamination of clean areas. The cover should not hinder access to the worker by first aid or ambulance personnel. Someone familiar with the handling and disposal of lead-contaminated clothing should accompany the injured worker to the hospital. If the worker is still contaminated with lead upon arrival at the hospital, the employer must inform hospital staff of this and instruct them on the appropriate disposal of contaminated clothing. The employer's written emergency procedures must detail the collection and handling of contaminated materials in such a situation.



# Part 3 — Lead-containing paints and coatings in the construction industry

---

# What is a lead-containing paint?

---

Lead-containing paints and other coatings can contain varying amounts of lead, ranging from less than 0.009% (90 mg/kg) to more than 50% (500,000 mg/kg) lead. The following factors contribute to the risk of worker exposure:

- The amount of lead in the paint
- The way in which the paint will be disturbed or removed (for example, scraping, sanding, grinding, using a heat gun, or torch cutting)
- The size of the job (for example, a small floor area, several walls, or the exterior of a large building)

The lead content of the paint or coating must be determined as part of the risk assessment. This can be done through a review of safety data sheets (or other pertinent documentation) or by collecting and analyzing paint samples.

A number of agencies have published figures that define a lead-containing paint:

- The U.S. Environmental Protection Agency (EPA) has stated that a lead value of 5,000 mg/kg or 0.5% dry weight is “positive” for lead in paint.
- The State of California’s Division of Occupational Safety and Health (commonly known as Cal/OSHA) has stated that the improper removal of lead paint containing 600 mg/kg lead can present an exposure risk to workers, and that an exposure control plan is required for lead work above this value.
- The U.S. *Consumer Product Safety Improvement Act* (CPSIA) considers a paint (or other surface coating) containing 90 mg/kg lead, or greater, to be lead-containing.
- Health Canada defines a lead-containing surface coating as a paint or other similar material that dries to a solid film that contains over 90 mg/kg (0.009%) dry weight of lead.

Unlike for an asbestos-containing material, WorkSafeBC does not numerically define what would be considered a lead-containing paint or coating. All suspected paints or coatings should be tested for lead because, depending on the nature of the work, even a small amount could pose a risk to workers. In order to determine which controls and personal protective equipment would be required for a particular job, a qualified person must consider this information as part of the risk assessment.



For example, use appropriate workplace controls during the removal or disturbance of any paint containing more than 90 mg/kg lead if vulnerable people are (or will be) present. These individuals could include pregnant women (or those trying to become pregnant), older workers, and children. The employer has a responsibility to protect all people who could be harmed by any lead released during the work.

More stringent workplace controls may be required based on the type of work activity, regardless of the amount of lead in the paint. For example, hand scraping of paint containing 700 mg/kg lead may not produce levels of airborne lead higher than one-half the exposure limit. However, abrasive blasting of the same paint will generate much greater levels of airborne lead.

Welding or torch cutting of paints or coatings on metal can create very high concentrations of airborne lead fumes. Torch cutting structural steel, coated with paint containing as little as 130 mg/kg lead, can release airborne levels of lead as high as 0.8 mg/m<sup>3</sup> (16 times the exposure limit).

Lead accumulating in dust on surfaces presents a secondary risk due to possible ingestion or inhalation by unsuspecting workers. For example, lead can build up over time on the back side of ceiling tiles if the paint on the structural steel overhead has deteriorated. Workers lifting the ceiling tiles can expose themselves and other workers to lead dust. If the proper controls and housekeeping are not used, a considerable quantity of lead can build up in surface dust over time.

# Classifying the risk of lead paint abatement work

---

When assessing the potential risk of worker exposure to lead during the disturbance or removal of lead-containing paint, the qualified person must generally follow the items listed in the “How do you assess the lead risk?” section (see page 23). In particular, the qualified person should consider:

- The age of the building. (The older the building, the more likely lead will be present in paint and accumulated dust.)
- The location of the work (small confined area, large area, indoors, outdoors, etc.).
- The size of the area to be disturbed or removed.
- The amount of lead in the paint or coating (see page 56).
- The condition of the paint or coating (intact, deteriorated, flaking, “chalking,” mouldy, etc.).
- The task or procedure. (How will the lead-containing coating be removed?)
- Whether there are other workers who might be affected by the work.
- The duration of the project.

Once a lead paint risk assessment has been completed, the information can be used to determine the level of exposure risk to workers based on the type of work they are engaged in. For example, work involving lead-containing paints or coatings can be classified as follows:

- Low
- Low–moderate
- Moderate
- Moderate–high
- High

These risk levels are based on the potential airborne lead concentration ranges in Table 4.

**Table 4. Recommended lead risk level classifications.**

Risk level	Potential airborne lead concentration (mg/m <sup>3</sup> )
Low	<0.05
Low-moderate	0.05–0.50
Moderate	>0.50–1.25
Moderate-high	>1.25–2.50
High	>2.50

*Please note that these risk levels are for airborne exposure only. Risk of ingestion must always be considered and accounted for.*

After the risk level has been determined for a particular work activity, control measures and respiratory protection can be selected using the information provided in Table 5 and the “Specific lead paint and coating removal operations” section (see pages 66 to 75). The control measures and respiratory protection provided in these pages are acceptable, provided that the employer’s work activities are equivalent to those listed.

### Low-risk activities

Low-risk activities are those in which workers are exposed to lead but the airborne exposure is not likely to exceed the eight-hour exposure limit (0.05 mg/m<sup>3</sup>). These include:

- Applying lead-containing paint with a brush or roller
- Installing or removing sheet metal that contains lead
- Operating an excavator (within the cab) during building demolition
- Transporting sealed containers of lead waste

### Low-moderate-risk activities

These include:

- Removing lead materials using a power tool with an effective dust collection system and HEPA filter
- Scraping or sanding (including wet sanding) of lead-containing coatings using non-powered hand tools
- Welding, burning, or cutting of surfaces from which lead-containing coatings have been removed

## Moderate-risk activities

---

These include:

- Removing lead-containing coatings with a chemical gel or paste by hand
- Removing lead-containing coatings with a heat gun
- Scraping or sanding lead-containing materials using non-powered hand tools (large projects)
- Manually demolishing lead-painted plaster walls or building components using a sledgehammer or similar tool
- Cleaning up and removing lead-containing dust and debris

## Moderate-high-risk activities

---

These include:

- Spraying on lead-containing coatings
- Using an electrical or pneumatic cutting device for dry removal of mortar that contains lead
- Removing lead-containing materials using power tools without an effective dust collection system equipped with a HEPA filter
- Removing or repairing ventilation systems used for controlling lead exposure
- Demolishing or cleaning up facilities where lead-containing products were manufactured
- Removing lead-containing surface coatings using a high-pressure waterjet

## High-risk activities

---

These include:

- Abrasive blasting of lead-containing surfaces (including wet, slurry, and dry abrasive blasting)
- Dry-ice blasting of lead-containing surfaces
- Using an air mist extraction system to remove lead dust

# Control measures for working with lead paints and coatings

Table 5 summarizes the recommended control measures and respiratory protection for work activities at different risk levels.

**Table 5. Recommended control measures and respiratory protection by risk level.**

Work activities	Control measures	Recommended respiratory protection
<p><b>LOW RISK</b></p> <ul style="list-style-type: none"> <li>• Applying lead-containing paint with a brush or roller</li> <li>• Installing or removing sheet metal that contains lead</li> <li>• Installing or removing bolts covered with lead-containing paint</li> <li>• Operating an excavator (within the cab) during building demolition</li> <li>• Transporting sealed containers of lead waste</li> </ul>	<ul style="list-style-type: none"> <li>• Washing facilities must be provided, including wash basins, tempered (warm) water, soap, and disposable towels.</li> <li>• Workers must not eat, drink, chew gum, smoke, or bite fingernails while in the work area.</li> <li>• Workers must wash their hands before eating, drinking, smoking, or leaving the work area.</li> <li>• Coffee and lunch breaks must be taken in a clean area separate from the work area.</li> <li>• Disposable drop sheets should be used below all lead operations.</li> <li>• Dust and waste must be cleaned up and placed in marked lead-waste containers that are dust-tight.</li> <li>• The work area must be kept clean, and compressed air or dry sweeping must not be used to remove dust.</li> <li>• Workers should remove all work clothes and shoes at the end of the workday and leave them at work.</li> </ul>	<ul style="list-style-type: none"> <li>• Respirators should not be required if safe work procedures and proper housekeeping protocols are followed.</li> </ul>

Work activities	Control measures	Recommended respiratory protection
<p><b>LOW-MODERATE RISK</b></p> <ul style="list-style-type: none"> <li>• Removing lead materials using power tools with dust collection systems and HEPA filters</li> <li>• Manual scraping or sanding of lead-containing materials using non-powered hand tools</li> <li>• Welding, burning, or cutting of surfaces from which lead-containing coatings have been removed</li> </ul>	<p>The following must be adopted in addition to the preceding low-risk procedures:</p> <ul style="list-style-type: none"> <li>• Erect barriers to prevent access to the work area by unprotected workers.</li> <li>• Post signs at every entrance to the work area. Signs must include warnings of lead contamination and the requirement for respiratory protection.</li> <li>• Workers must wear disposable coveralls and other personal protective equipment (e.g., eye and hearing protection) if they are required at the jobsite.</li> <li>• Use local exhaust ventilation equipped with HEPA filters when welding, burning, or cutting.</li> <li>• The work area must be kept clean, and workers must use cleaning methods that minimize the generation of dust, such as wet dusting, sweeping, or vacuuming using a vacuum with a HEPA filter on the exhaust.</li> </ul>	<ul style="list-style-type: none"> <li>• NIOSH-approved single-use N95, N99, or P100 respirator, or</li> <li>• Half- or full-facepiece elastomeric respirator equipped with P100 HEPA cartridges, or</li> <li>• Powered air-purifying respirator (PAPR) equipped with P100 HEPA cartridges</li> </ul>

Work activities	Control measures	Recommended respiratory protection
<p><b>MODERATE RISK</b></p> <ul style="list-style-type: none"> <li>• Removing lead-containing coatings with a chemical gel or paste by hand</li> <li>• Removing lead-containing coatings with a heat gun</li> <li>• Scraping or sanding lead-containing materials using non-powered hand tools (large projects)</li> <li>• Manually demolishing lead-painted plaster walls or building components using a sledgehammer or similar tool</li> <li>• Cleaning up and removing lead-containing dust and debris</li> </ul>	<p>The following must be adopted in addition to the preceding low-moderate-risk procedures:</p> <ul style="list-style-type: none"> <li>• Construct partial or full containment around work areas where significant scraping, sanding, or demolition will take place.</li> <li>• Where full containment is required, enclosures must be equipped with HEPA-filtered mechanical ventilation and kept under negative pressure.</li> <li>• Where full containment is required, provide separate changing areas and a shower.</li> <li>• When using a heat gun, keep the gun operating temperature as low as practicable.</li> </ul>	<ul style="list-style-type: none"> <li>• Half- or full-facepiece elastomeric respirator equipped with P100 HEPA cartridges, or</li> <li>• Powered air-purifying respirator (PAPR) equipped with P100 HEPA cartridges</li> <li>• Combination cartridges (e.g., HEPA and organic vapour) may be required when using chemical removal methods.</li> <li>• The type of respirator chosen will depend on the amount of material removed and the duration of the work.</li> </ul>

Work activities	Control measures	Recommended respiratory protection
<p><b>MODERATE-HIGH RISK</b></p> <ul style="list-style-type: none"> <li>• Spraying on lead-containing coatings</li> <li>• Using an electric or pneumatic cutting device for dry removal of mortar that contains lead</li> <li>• Removing lead-containing materials using power tools without an effective dust collection system equipped with a HEPA filter</li> <li>• Removing or repairing ventilation systems used for controlling lead exposure</li> <li>• Demolishing or cleaning up facilities where lead-containing products were manufactured</li> <li>• Removing lead-containing coatings using a high-pressure waterjet</li> </ul>	<p>The following should be adopted in addition to the preceding moderate-risk procedures:</p> <ul style="list-style-type: none"> <li>• Full containment enclosures should be constructed, equipped with HEPA-filtered mechanical ventilation and kept under negative pressure.</li> <li>• A decontamination facility should be constructed that has a dirty room for removing contaminated clothing, a shower room (with warm water), and a clean room for changing into street clothes.</li> <li>• Incorporate wet methods into the operation wherever possible to reduce dust.</li> </ul>	<ul style="list-style-type: none"> <li>• Full-facepiece elastomeric respirator equipped with P100 HEPA cartridges, or</li> <li>• Powered air-purifying respirator (PAPR) equipped with P100 HEPA cartridges, or</li> <li>• Full-facepiece supplied-air respirator operated in continuous-flow or pressure-demand mode.</li> <li>• The type of respirator chosen will depend on the amount of material removed and the duration of the work.</li> </ul>



Work activities	Control measures	Recommended respiratory protection
<p><b>HIGH RISK</b></p> <ul style="list-style-type: none"> <li>• Abrasive blasting of lead-containing coatings</li> <li>• Using an air mist extraction system to remove lead dust</li> <li>• Dry-ice blasting of lead-containing coatings</li> </ul>	<p>The following must be adopted in addition to the preceding moderate-high-risk procedures:</p> <ul style="list-style-type: none"> <li>• For dry abrasive blasting conducted outdoors, full containment enclosures equipped with HEPA-filtered mechanical ventilation must be constructed and kept under negative pressure.</li> <li>• Full enclosures used for wet abrasive blasting must be designed to capture the resulting water and debris.</li> <li>• Construct a decontamination facility that has a dirty room for removing contaminated clothing, a shower room (with warm water), and a clean room for changing into street clothes.</li> <li>• Avoid using silica sand as an abrasive.</li> <li>• Any ventilation or collection system that carries contaminated dust must be filtered before air is released to the atmosphere.</li> </ul>	<ul style="list-style-type: none"> <li>• Full-facepiece Type CE abrasive-blast supplied-air respirator operated in pressure-demand or positive-pressure mode, for abrasive blasting operations.</li> <li>• Full-facepiece supplied-air respirator operated in pressure-demand or positive pressure mode, when using an air mist extraction system.</li> </ul>

# Specific lead paint and coating removal operations

## Dry abrasive blast cleaning and vacuum blast cleaning

Dry abrasive or vacuum blast cleaning with a medium such as steel shot, crushed glass, or sand is commonly used to remove lead-containing coatings from metal surfaces such as bridges, tanks, or pressure vessels. The abrasive medium strips paint off and conditions the surface underneath so that new paint will stick to it better. Enclosures such as tarps or rigid materials such as wood, metal, or plastic help prevent the spread of lead and debris into the surrounding environment. However, these enclosures also increase the risk of worker exposure to the lead. Dry abrasive blast cleaning should be used only if less dusty methods, such as wet abrasive blast cleaning or high-pressure waterjetting, are not practicable.

Abrasive blasting of a lead-containing coating is classified as a **high-risk** work activity.



In lead abatement projects, removal of lead-containing coatings exposes workers to lead dust.

## Controls

- Enclose and ventilate the work area. Keep the work area under negative pressure to reduce the amount of lead released into the environment.
- Design and implement enclosures and ventilation systems that are specific to each work activity. For example, a series of mini-enclosures may be more effective at containing lead than one large enclosure.
- Ensure that any ventilation or collection system that carries contaminated dust is filtered before air is released to the atmosphere.
- Avoid using silica sand as an abrasive. Instead, use alternatives such as steel grit, dry ice, crushed glass, or crushed walnut shells. Review the safety data sheet (SDS) before selecting an abrasive. If the abrasive will be recycled, the equipment must be regularly monitored to ensure that the lead is effectively removed from the abrasive.
- Develop and implement a respirator program.
- Provide workers with Type CE abrasive-blast respirators, and ensure that they use them for abrasive blast cleaning operations. The respirators should be a supplied-air type with a tight-fitting facepiece.
- Follow good hygiene practices. Wash hands before breaks and meals and at the end of the day. Do not eat or smoke in the work area. Avoid touching the mouth with the hands.

## Wet abrasive blast cleaning

Wet abrasive blast cleaning also uses compressed air to propel an abrasive medium at the work surface. It is based on dry abrasive blast cleaning, but with water injected into the abrasive stream to reduce dust.

Abrasive blasting of a lead-containing coating is classified as a **high-risk** work activity.

## Controls

- Controls recommended for dry abrasive and vacuum blast cleaning also apply to wet abrasive blast cleaning.
- Corrosion inhibitors such as nitrates, nitrites, and amines may be needed to prevent flash rusting. These chemicals may also affect worker health. Before using these additives, review the SDSs to determine whether additional personal protective equipment and work procedures are required.

- The containment must be designed to capture the resulting water and debris. If practicable, the water should be filtered to remove debris and reduce the amount of waste generated.

## Dry-ice blasting

Dry-ice blasting is a less common removal system that directs dry-ice pellets through a blast hose and nozzle at high velocity. The pellets, which consist of frozen carbon dioxide (at  $-79\text{ C}$ ), abrade the surface and then evaporate so that only the paint debris remains.

Dry-ice blasting is classified as a **high-risk** work activity.

### Controls

- Enclosures must be constructed to contain the solid debris. They should not be airtight but should be ventilated (for example, using fans) with a continuous supply of fresh air passing by the workers.
- If the ventilation fails, an oxygen-deficient atmosphere high in carbon dioxide may develop. Workers should be supplied with personal gas monitors equipped with oxygen and carbon dioxide sensors. Alarms must be set to alert workers if the atmosphere in the containment or space changes.
- Develop and implement a respirator program.
- Provide workers with powered air-purifying respirators (PAPR) equipped with P100 HEPA cartridges, or full-facepiece supplied-air respirators operated in continuous-flow or pressure-demand mode.
- Follow good hygiene practices. Wash hands before breaks and meals and at the end of the day. Do not eat or smoke in the work area. Avoid touching the mouth with the hands.
- Provide workers with protective clothing and heavy gloves to prevent frostbite when they handle dry ice.
- Workers should take care not to bend over into the hopper when filling it with dry ice.

## High-pressure waterjetting

In high-pressure waterjetting, a pressure pump is used to direct water through a lance-and-nozzle assembly. The system does not generate much dust and is good for removing loose paint and rust. It is not very effective for removing tight paint, tight rust, or mill scale, but an abrasive can be added to the water stream to accomplish this.

High-pressure waterjetting is classified as a **moderate–high-risk** work activity.

### Controls

- Contain the work area to capture the resulting water and debris. If practicable, the water should be filtered to remove debris and reduce the amount of waste generated.
- Design and implement enclosures that are specific to each work activity. For example, a series of mini-enclosures may be more effective at containing lead than one large enclosure.
- Corrosion inhibitors such as nitrates, nitrites, and amines may be needed to prevent flash rusting. These chemicals may also affect worker health. Before using these additives, review the SDSs to determine whether additional personal protective equipment and work procedures are required.
- Develop and implement a respirator program.
- Provide workers with full-facepiece respirators or powered air-purifying respirators (PAPR) equipped with P100 HEPA cartridges, or full-facepiece supplied-air respirators operated in continuous-flow or pressure-demand mode.
- Follow good hygiene practices. Wash hands before breaks and meals and at the end of the day. Do not eat or smoke in the work area. Avoid touching the mouth with the hands.

## Manual scraping and sanding

Scraping using handheld tools generates lead dust and paint chips, and sanding may produce a lot of dust.

Sanding, scraping, or wire-brushing small areas is classified as a **low–moderate-risk** work activity. Removing paint from larger areas would be classified as a **moderate-risk** work activity.

### Controls

- Signs must be posted to warn unprotected workers.
- The work area must be surrounded by a barrier or partially or fully contained, depending on the findings of the risk assessment.
- Disposable drop sheets should be used below all lead operations.
- Mist peeling paint with water before scraping it.
- When sanding, mist the debris before sweeping or vacuuming it.
- Use HEPA vacuuming or HEPA mechanical ventilation.
- Develop and implement a respirator program.

- Provide workers with half- or full-facepiece elastomeric respirators equipped with P100 HEPA cartridges.
- Follow good hygiene practices. Wash hands before breaks and meals and at the end of the day. Do not eat or smoke in the work area. Avoid touching the mouth with the hands.



Workers hand-brushing lead residue from a steel structure

### Heat guns

Heat guns use a stream of hot air to separate the coating from the substrate so that it can be scraped off. Heat guns that operate above 370 C (700 F) can generate lead fumes. Scraping the residue from the surface can generate lead particulates.

Because of the potential for release of lead fumes or particulates, the use of a heat gun is classified as a **moderate-risk** work activity.

### Controls

- Signs must be posted to warn unprotected workers.
- The work area must be partially or fully contained, depending on the findings of the risk assessment.
- Disposable drop sheets should be used below all lead operations.
- Use thermostatic control to keep heat gun operating temperatures as low as practicable.
- Use HEPA vacuuming or HEPA mechanical ventilation.
- Develop and implement a respirator program.
- Provide workers with half- or full-facepiece elastomeric respirators equipped with P100 HEPA cartridges.
- Follow good hygiene practices. Wash hands before breaks and meals and at the end of the day. Do not eat or smoke in the work area. Avoid touching the mouth with the hands.

## Chemical removal

Solvent- or caustic-based paint strippers can be applied to surfaces by hand or spray gun. After a period of time, the coating can then be removed using a scraper, vacuum system, or pressurized water, followed by vacuuming to clean the surface.

Because of the potential for release of chemical vapours as well as lead, the use of solvent-based strippers would be classified as a **moderate-risk** work activity.

### Controls

- Signs must be posted to warn unprotected workers.
- The work area must be partially or fully contained, depending on the findings of the risk assessment.
- The work area must be ventilated (for example, using fans) with a continuous supply of fresh air passing by the workers.
- Disposable drop sheets should be used below all lead operations.
- Many chemical stripping products require additional controls because they are skin irritants or skin corrosives, and some are toxic when inhaled or absorbed through the skin. The SDSs must be reviewed for recommendations regarding personal protective equipment. Note: Some chemicals (such as methylene chloride) should be replaced with less hazardous substitutes.
- Develop and implement a respirator program.
- Provide workers with half- or full-facepiece elastomeric respirators equipped with P100 HEPA cartridges for lead. A combination

cartridge (for example, HEPA and organic vapour) may be required to protect workers from exposure to chemical vapours.

- Follow good hygiene practices. Wash hands before breaks and meals and at the end of the day. Do not eat or smoke in the work area. Avoid touching the mouth with the hands.
- Chemical stripping removes paint only. Rust and mill scale may require abrasive blasting afterwards.

## Welding, burning, and torch cutting

Using an arc welder or oxyacetylene torch on steel that is coated with lead-containing paint can create hazardous lead fumes and is prohibited by section 12.115 of the Regulation. Coatings may consist of several layers of paint that could contain as much as 50% lead content. This material must be removed from the surface before welding, burning, or torch cutting takes place. Surface sampling using wipes can help determine the effectiveness of the method used to remove the lead coating.

Welding, burning, and torch cutting of surfaces from which the lead paint (or coating) has been removed are classified as **low-moderate-risk** work activities (see Table 5).



Welding may be a source of lead exposure if lead is in the coating or in the metal being welded.

### Controls

- Signs must be posted to warn unprotected workers.
- The work area should be surrounded by a barrier or enclosed.



- Use pneumatic air tools to remove rivets, instead of burning or torch cutting.
- Use hydraulic shears to cut steel.
- Use chemical stripping, vacuum-shrouded hand tools, or vacuum blasting to strip lead-containing coatings back at least 10 centimetres (4 inches) from both sides of the area where heat will be applied (or as determined by a risk assessment). Additional controls may be required, depending on the methods used to remove the paint.
- Use local exhaust ventilation equipped with HEPA filters. With flexible duct systems, the welder must keep the duct straight and close to the source of the fumes. Make sure exhausted air does not create a hazard.
- Develop and implement a respirator program.
- Provide workers with half- or full-facepiece elastomeric respirators equipped with P100 HEPA cartridges, or powered air-purifying respirators (PAPR) equipped with P100 HEPA cartridges.
- Follow good hygiene practices. Wash hands before breaks and meals and at the end of the day. Do not eat or smoke in the work area. Avoid touching the mouth with the hands.

## Manual demolition

Using hand tools such as sledgehammers to demolish walls or other building structures can generate high levels of lead dust from plaster or drywall walls with lead-containing coatings. Careful removal of components such as windows, cabinets, and trim generally presents a low risk of exposure, unless the components are deteriorating.

Manual demolition is classified as a **moderate-risk** work activity.

### Controls

- Signs must be posted to warn unprotected workers.
- Install partitions or other temporary barriers to contain dust.
- Moisten surfaces and debris to minimize dust generation.
- Cut wallboard into large pieces using a carpet knife. Alternatively, use a shrouded saw with HEPA filtration.
- Use HEPA vacuuming to remove dust and debris.
- Develop and implement a respirator program.
- Provide workers with half- or full-facepiece elastomeric respirators equipped with P100 HEPA cartridges.
- Follow good hygiene practices. Wash hands before breaks and meals and at the end of the day. Do not eat or smoke in the work area. Avoid touching the mouth with the hands.

## Power tools

---

Impact, grinding, and brushing tools can generate lead dust and paint chips. Paint-removal tools include needle guns, disc sanders, grinders, power wire brushes, rotary hammers, rotary peelers, and scarifiers.

The risk classification for the use of power tools depends upon the presence or absence of local exhaust ventilation. If the tools are provided with HEPA vacuum attachments, the risk level is **low-moderate** (if air monitoring shows that airborne concentrations are below 0.05 mg/m<sup>3</sup>). If the tools do not have an effective dust collection system (with a HEPA filter attachment), the risk level is considered **moderate-high**.

### Controls

- Signs must be posted to warn unprotected workers.
- The work area must be surrounded by a barrier or partially or fully contained, depending on the findings of the risk assessment.
- Contain and ventilate the work area when using tools without an effective dust collection system. Keep the work area under negative pressure to reduce the amount of lead released into the environment.
- Disposable drop sheets should be used below all lead operations.
- Use shrouded tools with a vacuum attachment and appropriate HEPA filtration whenever practicable.
- Keep shrouds flush with the work surface.
- Use HEPA vacuuming to remove dust and debris.
- Develop and implement a respirator program.
- Provide workers with full-facepiece elastomeric respirators equipped with P100 HEPA cartridges, or powered air-purifying respirators (PAPR) equipped with P100 HEPA cartridges.
- Follow good hygiene practices. Wash hands before breaks and meals and at the end of the day. Do not eat or smoke in the work area. Avoid touching the mouth with the hands.

## Spraying lead-containing paint

---

Painting with lead-containing paint (mainly lead primers) is a primary source of lead exposure in the construction industry. The magnitude of exposure is based on the lead content of the product used and the amount of paint applied.

Spraying lead-containing paint is classified as a **moderate-high-risk** activity.

### Controls

- Signs must be posted to warn unprotected workers.
- Contain and ventilate the work area. Use local exhaust ventilation with proper filtration (such as HEPA filtration).
- Disposable drop sheets should be used below all lead operations.
- Develop and implement a respirator program.
- Provide workers with full-facepiece elastomeric respirators equipped with P100 HEPA cartridges, or powered air-purifying respirators (PAPR) equipped with P100 HEPA cartridges. A combination cartridge (for example, HEPA and organic vapour) may be required to protect workers from exposure to chemicals in the paint.
- Follow good hygiene practices. Wash hands before breaks and meals and at the end of the day. Do not eat or smoke in the work area. Avoid touching the mouth with the hands.



# Appendices

---

<b>Appendix A: Testing for lead</b> .....	<b>78</b>
<b>Appendix B: Example lead clearance levels by jurisdiction, organization, or company</b> .....	<b>82</b>
<b>Appendix C: Sample exposure control plan for removing lead-containing paint using hand tools</b> .....	<b>84</b>
<b>Appendix D: Guide to health monitoring</b> .....	<b>92</b>
<b>Appendix E: Training courses</b> .....	<b>97</b>
<b>Appendix F: References</b> .....	<b>98</b>

# Appendix A: Testing for lead

---

## **Bulk sampling**

Bulk samples can be collected and submitted to a laboratory for lead analysis. For example, the U.S. National Institute of Occupational Safety and Health (NIOSH) has developed a number of methods for analyzing lead in paint, including methods 7082, 7105, and 7300.

The paint sample collected should be about 2.5 centimetres (cm) by 2.5 cm in area. When collecting paint samples, make sure that all of the layers of paint or coating are collected, right down to the original surface. The results are usually reported by the laboratory in micrograms per gram ( $\mu\text{g/g}$ ) or milligrams per kilogram ( $\text{mg/kg}$ ). If the area sampled is included, the lab may also report results in milligrams per square centimetre ( $\text{mg/cm}^2$ ).

For risk assessment purposes, paint samples must not be analyzed using the Toxicity Characteristic Leaching Procedure (TCLP). This method is designed to determine the “mobility” or “leachability” of lead in liquid and solid wastes, not occupational exposure to lead dust, mist, or fumes.

Take care not to contaminate adjacent areas while collecting samples. The damaged area should be encapsulated or repaired, and any dust or debris removed by wet-wiping or HEPA vacuuming.

## **X-ray fluorescence (XRF) analyzers**

Portable X-ray fluorescence analyzers are available to measure the amount of lead in suspected building and other materials. These units work by exposing the sample material to X-rays or gamma radiation, which causes any lead present to emit energy with a certain frequency. This energy is then measured by the instrument, and a lead concentration is displayed.

The major advantages of XRF analyzers over other methods are as follows:

- They give an immediate reading of the amount of lead present, without damaging the sample.
- Numerous readings can be taken quickly.
- XRF analyzers can also measure lead in wipes, dust, soil, and air filters.

However, XRF analyzers have the following significant disadvantages:

- The instruments are very expensive.
- The thickness of the material (e.g., the number of layers of paint) and the surface shape (e.g., curved surfaces) may influence the results.
- Most instruments report results per unit area (for example,  $\mu\text{g}/\text{cm}^2$ ), rather than per unit weight. (Some instruments can be calibrated to read out directly in parts per million.) It is not generally possible to correlate XRF data (in  $\mu\text{g}/\text{cm}^2$  or  $\text{mg}/\text{cm}^2$ ) with laboratory results reported by weight (in ppm,  $\text{mg}/\text{kg}$ , or a percentage). You would have to know both the thickness and density of the paint in the area measured.
- Rigorous training is required to understand the operation of the instruments and to use them safely.

Users (for example, employers, consultants, or workers) will need to develop a calibration table or chart that compares the analysis of laboratory samples (or standards supplied by the manufacturer) with readings from the XRF analyzer. The analyzer must also be calibrated before use in accordance with the manufacturer's instructions. Lead paint films for calibration can be purchased from NIST ([www-s.nist.gov/srmors/viewTableV.cfm?tableid=55](http://www-s.nist.gov/srmors/viewTableV.cfm?tableid=55)) or SCP Science ([scpscience.com/en/products/categories?id=20&name=matrix-reference-materials](http://scpscience.com/en/products/categories?id=20&name=matrix-reference-materials)).

Portable XRF instruments emit X-rays or gamma radiation. These instruments should be used only in accordance with a written radiation safety program. Operators of tube-based devices must have a valid X-ray Fluorescence Operator Certification from Natural Resources Canada. Units that use a radioactive source are licensed to employers by the Canadian Nuclear Safety Commission (CNSC).

All users of these devices must be properly trained both to handle the instrument and to protect themselves and other workers from radiation. For example, there should be no one near the opposite side of the area (wall, ceiling, or floor) being tested.

### **Lead on surfaces**

Lead in surface dust can be collected by wipe-sampling or vacuum-sampling techniques. Wipe sampling requires completely wiping a measured surface area (usually 10 cm by 10 cm or 1 foot by 1 foot) with a pre-wetted wipe. Commercially available hand wipes are suitable, as are sterile cotton gauze and ashless filter paper material. These should be lead-free and easily processed by the laboratory. Wipe sampling can determine surface lead loading (usually in micrograms per unit area) as well as dermal exposures

(for example, lead dust on hands). A standard laboratory method for lead in surface wipe samples is NIOSH Method 9100.

Vacuum sampling is particularly suitable for soft surfaces. The most common sampling device is a filter cassette attached to a personal sampling pump, but specialized high-flow vacuums are also available for sampling lead dust. Regardless of the sampling device used, the area sampled must be recorded. Vacuum sampling can determine lead contamination by area and weight (if pre-weighed filters or cassettes are used). NIOSH methods 7082 and 7105 are suitable for determining the amount of lead in vacuum sample cassettes.

### Lead test kits

Lead test kits are available that are intended mainly for consumers to use to determine whether lead is present on surfaces. They are both easy to use and inexpensive. The kits use a colorimetric reaction with the lead (usually a pink colour change) that is immediately visible. However, these kits do not give an actual number for the lead present — just a yes/no type of response.

The U.S. Occupational Safety and Health Administration (OSHA) has tested a number of these kits and posted its results at [osha.gov/SLTC/leadtest/index.html](https://www.osha.gov/SLTC/leadtest/index.html).

Although these kits are useful as a quick screening tool to check for lead, a negative response does not prove that lead is not present. For a more thorough lead analysis, a bulk sample should be collected and sent to a laboratory.

### Lead in air

To measure worker exposure to airborne lead, samples are collected from a worker's breathing zone using a filter cassette connected to a personal sampling pump. The duration of the sample collection depends on the time required to perform the work and the amount of dust in the air. Ideally, the sample should be collected for a full workshift, but shorter periods may be required in order to prevent overloading of the cassette in dusty atmospheres. The cassettes are submitted to a laboratory for analysis. Lead content is reported in mg/m<sup>3</sup> or µg/m<sup>3</sup>. NIOSH methods 7082 and 7300 are suitable for determining the amount of lead in air samples.

### Selecting a laboratory

Laboratory services are usually chosen based on sample cost, turnaround time, and convenience of location. You should,

#### NIOSH analytical methods

The NIOSH analytical methods that have been referenced in this section can be downloaded from [cdc.gov/niosh/docs/2003-154/](https://www.cdc.gov/niosh/docs/2003-154/).



however, ask the following straightforward questions to find out whether the laboratory can provide the proper service:

- Is the laboratory accredited?  
A number of agencies, including the Canadian Association for Laboratory Accreditation (CALA) and the American Industrial Hygiene Association (AIHA), offer laboratory accreditation programs.
- Does the laboratory participate in a proficiency testing program?  
The AIHA administers an Environmental Lead Proficiency Analytical Testing (ELPAT) program, where test samples are sent to participants four times a year. These test samples include paint chips, soil samples, dust wipes, and air filters.
- Does the laboratory have a quality control program?
- What analytical methods does the laboratory follow, and what are their detection limits? (The detection limit is the level below which the laboratory cannot report an accurate amount of lead.)
- What is the turnaround time for sample analysis?
- What is the sample cost?
- Will the laboratory provide sampling materials?  
Many laboratories will provide wipes, gloves, templates, tubes, air sample cassettes, etc., for submitting samples.
- Will the laboratory accept composite samples (for example, paint samples combined from several sources)?
- Will the laboratory complete all of the calculations?  
Some labs will report only the actual amount of lead found on the sampling media (such as wipes or filter cassettes) and leave it up to the sampler to convert the results to  $\mu\text{g}$  lead/gram of dust,  $\mu\text{g}/\text{cm}^2$  of surface, or  $\text{mg}/\text{m}^3$  of air.

# Appendix B: Example lead clearance levels by jurisdiction, organization, or company

Organization	Date	Floor		Sill/Ledge		Trough/Well	
		( $\mu\text{g}/\text{sq. ft.}$ )	( $\text{mg}/\text{m}^2$ )	( $\mu\text{g}/\text{sq. ft.}$ )	( $\text{mg}/\text{m}^2$ )	( $\mu\text{g}/\text{sq. ft.}$ )	( $\text{mg}/\text{m}^2$ )
U.S. Environmental Protection Agency (EPA)	2001	40 (residential)	0.4	250 (residential)	2.7	400 (residential)	4.3
U.S. Department of Housing and Urban Development (HUD)	1990	200 (residential)	2.2	500 (residential)	5.4	800 (residential)	8.6
HUD	2001	40 (residential)	0.4	250 (residential)	2.7	400 (residential)	4.3
U.S. Occupational Safety and Health Administration (OSHA)	1993	200 (use HUD level)	2.2				
Government of Alberta	2008	40	0.4	250	2.7	400	4.3
Canadian Department of National Defence (firing range)	2003	100	1.1	500	5.4	800	8.6
Standards Association of Australia	1998	93 (100)	1	463 (500)	5	741 (800)	8

Organization	Date	Floor		Sill/Ledge		Trough/Well	
		( $\mu\text{g}/\text{sq. ft.}$ )	( $\text{mg}/\text{m}^2$ )	( $\mu\text{g}/\text{sq. ft.}$ )	( $\text{mg}/\text{m}^2$ )	( $\mu\text{g}/\text{sq. ft.}$ )	( $\text{mg}/\text{m}^2$ )
State of California (Lawrence Livermore National Laboratory)	2005	100 (higher at industrial hygienist's discretion)	1.1	500 (higher at IH's discretion)	5.4	800 (higher at IH's discretion)	8.6
						800 (for exterior concrete)	8.6
State of Missouri	2007	200 (commercial & industrial)	2.2	500 (commercial & industrial)	5.4	800 (commercial & industrial)	8.6
U.S. Navy (firing range)	2002	200	2.2				
Envirosafe Training and Consultants (Pittsburgh)	2001	1,000 (commercial & industrial)	10.1				

**Note:**  $1 \text{ m}^2 = 10,000 \text{ cm}^2 = 10.8 \text{ sq. ft.}$ ;  $1 \text{ mg} = 1,000 \mu\text{g}$

# Appendix C: Sample exposure control plan for removing lead-containing paint using hand tools

---

Removing lead-containing paint without proper controls can generate lead dust. Lead enters the body when the dust is inhaled or ingested (swallowed). Once it is in the bloodstream, lead can be carried throughout the body. Lead exposure can cause a number of health effects, including weakness, headaches, stomach cramps, muscle and joint pain, and memory problems.

## Company information

- [Name]
- [Address]
- [Contact information — names and phone numbers]

## Worksite information

- [Project name]
- [Address]

## Health hazards from lead exposure

- Lead interferes with many body processes and is poisonous to most organs and tissues, including the bones, intestines, kidneys, nervous system, and reproductive organs.
- Acute lead poisoning (high exposure over a short period of time) can cause fatigue, anemia, constipation, and damage to the nervous system.
- Chronic lead poisoning (exposure over a longer period of time) can cause fatigue, joint pain, and weakness.
- Lead poisoning can damage the fetus in pregnant female workers, and impair fertility in male workers.
- Workers are exposed to lead when they inhale lead-containing dust or ingest lead residue from their hands (for example, when eating, chewing gum, or smoking).
- Lead is a suspected human carcinogen and has been shown to cause cancer in laboratory animals.

## Statement of purpose

- [Company name] has a duty to protect our workers from lead exposure during the removal of lead-containing paints and coatings. Studies show that these operations generate airborne lead dust well in excess of safe levels. Effective controls are available to protect workers from harmful exposure.
- A combination of control measures will be required to achieve this objective. We commit to being diligent in our efforts to select the most effective control technologies available, and to

ensure that the best practices, as described in this exposure control plan (ECP), are followed at our worksites.

- The work procedures we establish will protect not only our workers but also any other workers on site who are not involved in these operations.

## **Responsibilities of employers, supervisors, and workers**

### ***Employers***

The employer is responsible for the following:

- Ensuring that the materials (e.g., tools, equipment, personal protective equipment [PPE]), and other resources (e.g, worker training) are readily available to fully implement and maintain this ECP.
- Ensuring that supervisors and workers are educated in the hazards of lead exposure, and trained to work safely during the removal of lead-containing paints and coatings.
- Ensuring that workers follow the requirements of the Occupational Health and Safety Regulation and the *Workers Compensation Act*.
- Maintaining written records of training (e.g., proper use of respirators), fit-test results, crew talks, and inspections (e.g., of equipment).
- Conducting an annual review (or more often if conditions change) of the effectiveness of the ECP. This includes a review of available control technologies to ensure that these are selected and used when practicable.
- Coordinating work with the prime contractor and other employers to ensure a safe work environment.
- Initiating immediate investigations into incidents/accidents and reporting these to WorkSafeBC.

### ***Supervisors***

Supervisors are responsible for the following:

- Providing adequate instruction to workers on the hazards of lead exposure.
- Selecting and implementing the appropriate control measures.
- Ensuring that workers using respirators have been properly trained and fit-tested, and that the results are recorded.
- Ensuring that work is conducted in a manner that minimizes and adequately controls the risk to workers and others. This includes ensuring that workers use appropriate engineering controls and wear the necessary PPE.
- Immediately correcting unsafe acts and conditions.

## **Workers**

Workers are responsible for the following:

- Participating in all required health and safety education and training.
- Using the assigned protective equipment in an effective and safe manner.
- Following established work procedures as directed by the supervisor.
- Reporting any unsafe conditions or acts to the supervisor.
- Reporting to the employer any exposure incidents or any signs or symptoms of lead illness.

## **Hazard identification and risk assessment**

- Lead-containing paints can contain anywhere from 0.009% to 50% lead by weight.
- Removing lead-containing paint without the use of proper controls and PPE can expose workers to levels of airborne lead dust that are above the exposure limit listed in the Regulation.
- Workers are also at risk of exposure by accidental ingestion of lead from contaminated surfaces.
- Unprotected workers or other persons may be exposed to the hazards of lead. All lead work locations will be enclosed by barriers or barrier tape and identified with signs or placards.

## **Exposure limit**

- The 8-hour occupational exposure limit (EL) for inorganic lead is 0.05 milligrams per cubic metre (mg/m<sup>3</sup>).
- Because lead is a suspected human carcinogen and linked with cancer in animals, workplace exposures must be reduced to levels that are as low as reasonably achievable (ALARA) below the EL.

## **Lead dust controls**

- The Regulation requires employers to select lead dust controls based on the following hierarchy:
  - (1) Engineering controls (for example, barriers, enclosures, general ventilation, local exhaust ventilation)
  - (2) Administrative controls (for example, wash stations, separate eating and changing areas, and limiting the time workers are exposed to lead)
  - (3) Personal protective equipment (such as respirators and disposable coveralls)
- Respirators will be used in conjunction with other controls to reduce worker exposure to lead, unless air monitoring information suggests otherwise.
- A HEPA vacuum will be used for cleanup and decontamination.

## Acceptable control methods for removing lead-containing paint

- The work methods in the following table are acceptable, provided that the respirator selection, dust suppression, and other controls are adhered to.
- The following control options will be used to eliminate or reduce the risk to workers from the hazards of lead dust exposure, unless air monitoring information suggests otherwise.

Work activity	Dust suppression	Other controls	Respirator type
Manual (hand) sanding/ scraping	<ul style="list-style-type: none"> <li>• Peeling paint will be misted with water before scraping.</li> <li>• Debris will be misted before sweeping or vacuuming.</li> <li>• A HEPA vacuum will be used to remove debris.</li> </ul>	<ul style="list-style-type: none"> <li>• Disposable drop sheets will be placed below the work area.</li> <li>• Barriers (e.g., a tape barrier) will be installed to restrict access to the work area.</li> <li>• Signs will be posted at every entrance to the work area.</li> <li>• Workers will use disposable coveralls.</li> </ul>	<ul style="list-style-type: none"> <li>• NIOSH-approved single-use N95, N99, or P100 respirator</li> <li>• Half-facepiece respirator with HEPA P100 series filters</li> </ul>
Manual scraping using heat guns	<ul style="list-style-type: none"> <li>• The heat gun temperature must be kept as low as practicable.</li> <li>• Debris will be misted before sweeping or vacuuming.</li> <li>• A HEPA vacuum will be used to remove debris.</li> </ul>	<ul style="list-style-type: none"> <li>• Disposable drop sheets will be placed below the work area.</li> <li>• Barriers (e.g., a tape barrier) will be installed to restrict access to the work area.</li> <li>• Partial or full containment will be constructed around work areas where significant removal will take place.</li> <li>• Where full containment is required, enclosures will be equipped with HEPA-filtered mechanical ventilation.</li> <li>• Signs will be posted at every entrance to the work area.</li> <li>• Workers will use disposable coveralls, and separate changing areas will be provided.</li> </ul>	<ul style="list-style-type: none"> <li>• Half-facepiece respirator with HEPA P100 series filters</li> </ul>

Work activity	Dust suppression	Other controls	Respirator type
Manual scraping using a chemical stripper	<ul style="list-style-type: none"> <li>• Debris will be misted before sweeping or vacuuming.</li> <li>• A HEPA vacuum will be used to remove debris.</li> </ul>	<ul style="list-style-type: none"> <li>• Disposable drop sheets will be placed below the work area.</li> <li>• Barriers (e.g., a tape barrier) will be installed to restrict access to the work area.</li> <li>• Signs will be posted at every entrance to the work area.</li> <li>• The work area will be ventilated with a continuous supply of fresh air for the workers.</li> <li>• Partial or full containment will be constructed around work areas where significant removal will take place.</li> <li>• Where full containment is required, enclosures will be equipped with HEPA-filtered mechanical ventilation.</li> <li>• Workers will use disposable coveralls.</li> <li>• Methylene chloride products will not be used.</li> <li>• Additional PPE (e.g., gloves and goggles) may be required as recommended by the SDS for the chemical stripper.</li> </ul>	<ul style="list-style-type: none"> <li>• Half-facepiece respirator with HEPA P100 series/organic vapour cartridges</li> <li>• Additional respiratory protection may be required as recommended by the SDS for the chemical stripper</li> </ul>



Work activity	Dust suppression	Other controls	Respirator type
Removing paint using powered hand tools	<ul style="list-style-type: none"> <li>• <b>Tools equipped with a HEPA-filtered dust collection system will be used.</b></li> <li>• Debris will be misted before sweeping or vacuuming.</li> <li>• A HEPA vacuum will be used to remove debris.</li> </ul>	<ul style="list-style-type: none"> <li>• Disposable drop sheets will be placed below the work area.</li> <li>• Barriers (e.g., a tape barrier) will be installed to restrict access to the work area.</li> <li>• Signs will be posted at every entrance to the work area.</li> <li>• Workers will use disposable coveralls.</li> </ul>	<ul style="list-style-type: none"> <li>• NIOSH-approved single-use N95, N99, or P100 respirator</li> <li>• Half-facepiece respirator with HEPA P100 series filters</li> </ul>
	<ul style="list-style-type: none"> <li>• <b>Tools without a dust suppression system will be used.</b></li> <li>• Debris will be misted before sweeping or vacuuming.</li> <li>• A HEPA vacuum will be used to remove debris.</li> </ul>	<ul style="list-style-type: none"> <li>• Disposable drop sheets will be placed below the work area.</li> <li>• Partial or full containment must be constructed around work areas where removal will take place.</li> <li>• Where full containment is required, enclosures must be equipped with HEPA-filtered mechanical ventilation.</li> <li>• Workers will use disposable coveralls.</li> </ul>	<ul style="list-style-type: none"> <li>• Full-facepiece elastomeric respirator equipped with P100 HEPA cartridges, or</li> <li>• Powered air-purifying respirator (PAPR) equipped with P100 HEPA cartridges</li> </ul>

### Safe work planning

- Select one or more of the methods described in the preceding table.
- Establish a barrier or full enclosure around the work zone to restrict access by unprotected workers. (Full enclosures may require negative-pressure ventilation through a HEPA filter.)
- Inspect all dust control equipment and tools to make sure they are in good working order.
- Use and maintain all tools and equipment as specified by the manufacturer. For example, test the effectiveness of HEPA filters using dioctyl phthalate (DOP) testing or similar means at least annually, and any time a HEPA filter is replaced in a vacuum cleaner or ventilation system.
- When working on a multi-employer site, provide the general contractor with a copy of the lead exposure control plan and safe work procedures. Review the procedures and work schedule

with the general contractor to determine whether additional measures are required to reduce worker exposure to lead.

- Ensure that workers inspect their respirators before start-up.

### **Respiratory protective equipment**

- Each worker will be fit-tested if a respirator is required.
- If a worker is required to wear a respirator that requires an effective seal with the face for proper functioning, the worker must be clean-shaven where the respirator seals with the face.
- When the worker notices a notable resistance to breathing, the respirator filters must be replaced.
- Respirators will be used, cleaned, and stored in accordance with the respiratory protection program.

### **Other personal protective equipment and hygiene**

- Workers should change from street clothes to work clothes (including footwear) at the beginning of their workshift.
- Street clothes should be kept separate from work clothes.
- Washing (and shower, if required) facilities should be located between “clean” changing areas and “dirty” work areas.
- Workers should remove contaminated outer work clothing and thoroughly wash their hands and faces before eating, drinking, or smoking.
- No eating, drinking, smoking, chewing gum, or nail-biting should be allowed in the work area.
- No food, gum, cigarettes, or other personal items should be stored in the work area.
- Coffee and lunch breaks should be taken in a clean area separate from the work area.
- Workers should remove all work clothes and shoes at the end of the workday and leave them at work.
- Workers should wash (or shower) before leaving work to ensure that any potential contamination is removed before they go home.
- Workers should not take any contaminated items home, as this may expose family members to lead.

### **Housekeeping procedures**

- Dry sweeping and the use of compressed air are **prohibited** for removing dust and debris containing lead. Work areas and equipment covered by dust will be cleaned at the end of every shift using a HEPA-filtered vacuum.
- Wet cleanup may also be used to remove dust.

- Waste material will be placed in a dumpster and will be removed at least weekly. The location and method used to store waste will not allow lead-containing dust to re-enter the workplace.
- Supervisors are responsible for ensuring that work areas are free from dust at the end of each shift.

### **Worker training for lead exposure**

- Training will be performed by the employer or the employer's designate.
- Records of attendance, dates of training, and training material will be documented and retained.
- Additional training or reference material on lead exposure will be made available to employees upon request.

#### ***Training topics***

Training topics will include:

- Health hazards of lead exposure
- Engineering controls and safe work practices used to protect workers
- The importance of proper equipment control and maintenance
- Housekeeping procedures
- Proper use of respirators and the respirator program
- Personal hygiene procedures to reduce exposures
- The details of the exposure control program for lead

### **Health surveillance**

A health monitoring program (including the collection and analysis of blood samples) will be implemented, under the supervision of an occupational physician, for projects of long duration.

### **Annual review**

This ECP will be reviewed at least annually and updated as necessary by the employer, in consultation with the joint health and safety committee (or the worker health and safety representative, if applicable).

# Appendix D: Guide to health monitoring

---

The purpose of health monitoring is to protect workers from developing occupational disease. Health monitoring means detecting biological indicators or adverse health effects at an early stage to — in order of decreasing preference — prevent, reverse, reduce the severity of, or arrest the progression of the adverse health effects or disease.

Although health monitoring must not be used as a substitute for environmental monitoring, it is complementary to it. In the case of substances absorbed by the skin or inadvertently ingested, air monitoring alone will not provide an accurate indication of exposure.

## **Inorganic lead exposure and toxicity**

Inorganic lead is absorbed into the body either by inhalation of dust or fumes into the lungs or by inadvertent ingestion, such as may occur through nail-biting, eating, and drinking in contaminated areas, and smoking.

Blood lead concentration is the best available indicator of current inorganic lead absorption. The concentration rises immediately after the first inhalation and reaches a steady state after weeks or months.

Urinary lead concentration is variable and does not reflect the amount of inorganic lead in the body. It is therefore *not* an effective tool for monitoring exposure to inorganic lead.

Overt symptoms of lead poisoning in adults are generally first seen at blood levels between 2.0 and 4.0  $\mu\text{mol/L}$  (40–80  $\mu\text{g/dL}$ ). However, effects can occur at lead levels lower than previously determined.

Acute lead poisoning follows high exposure over a short period of time. Signs and symptoms of acute lead poisoning include abdominal colic, constipation, fatigue, anemia, and peripheral neuropathy. The central nervous system may be affected, and sometimes the classic gingival (gum) blue line is seen. These effects do not occur until blood lead levels are over 2.5–3.0  $\mu\text{mol/L}$  (50–60  $\mu\text{g/dL}$ ).

Chronic lead toxicity can result from significant absorption over a longer period of time. In cases of chronic absorption, the effects are more insidious, with symptoms such as headache, fatigue, joint pain, and weakness.

## **Reproductive toxicity**

### *Woman and fetus*

Neurological damage to the fetus can occur if blood lead levels in the mother exceed 0.5–1  $\mu\text{mol/L}$  (10–20  $\mu\text{g/dL}$ ). Lead passes virtually unimpeded across the placenta, and the resulting neurological fetal impairment appears to be irreversible. It is possible that there is no threshold limit at which adverse effects could not occur in the course of development of the human fetus.

During a woman's pregnancy, blood lead levels rise and may double. This may be a result of hormonally induced mobilization of lead stored in bone. Fetal risk is therefore greater in women who have high lead stores due to past exposure. Pregnant women or women trying to become pregnant should be reassigned to tasks that do not involve lead exposure.

### *Men*

Reported effects of lead on the male reproductive system include lower sperm counts and a higher percentage of abnormally shaped sperm, although there is no strong evidence that these effects impair fertility. The maximum blood lead level that does not produce these changes appears to be 2.0  $\mu\text{mol/L}$  (40  $\mu\text{g/dL}$ ).

Studies have suggested that duration of lead exposure, rather than actual concentration, is important, and that profound effects are seen in individuals with prolonged exposure even at relatively low blood lead levels.

## **Employers' guide to health monitoring**

### *Program management*

To run your health monitoring program, you will need the assistance of a physician or a nurse affiliated with a physician. This health care professional will set up the program and interpret results. He or she should assist you in determining the appropriate type of biological sample required and the time of day or week to collect it, depending on the nature of the exposure and the persistence of the substance in the body (the "half-life" of the substance).

The physician or nurse may be an occupational health specialist or may be a health care professional with an interest in occupational health.

Biological monitoring must not be used as a substitute for environmental (air) monitoring as, in some cases, air sampling may provide the only method of control evaluation. However, in the

case of substances absorbed by the skin or inadvertently ingested (for example, lead), air monitoring alone may not be an accurate indicator of exposure.

### ***Blood samples***

If blood samples are required, collection of these samples must be authorized by a physician. Sample collection is usually carried out by a local laboratory. Sometimes, arrangements can be made so that the laboratory or health care worker collects the samples on site. This not only minimizes disruption of workflow but also ensures that the samples arrive in one batch at the laboratory performing the analyses.

Samples collected for different analyses must be collected in different types of specimen containers. Storage and transport conditions will also vary with the nature of the specimen. The laboratory can provide you with the necessary information.

The collecting laboratory will charge you for the service.

### ***Results***

Results will be sent to the requesting physician. The actual numerical results of a worker's lab test cannot be given to the employer without the worker's signed, informed consent. The results must then be treated and stored like other confidential materials.

### ***Participation***

Whether health monitoring is voluntary or legally required, a worker cannot be forced to give a biological sample. If the worker's reluctance to participate makes the employer unable to comply with the Occupational Health and Safety Regulation, the worker may have to be restricted from work where the potential for significant exposure exists.

It is therefore important that:

- The worker's consent to participate be obtained.
- The worker be told exactly what tests are to be carried out and that those are the only tests performed.
- The worker's consent be informed. In other words, the worker understands what may happen if the test results suggest that exposure should be reduced (such as temporary removal from the job).

### ***Main steps in a health monitoring program***

1. Define the purpose of the program.
2. Appoint a competent person to manage the program.
3. Consult with employees or their representatives.
4. Get a physician to authorize requisitions for biological sampling and analysis.
5. Establish procedures for sample collection (including details of sampling media, timing, etc.), storage, transportation, analysis, and quality assurance.
6. Following the principles of confidentiality, establish procedures for interpretation and reporting of results.
7. Obtain workers' written, informed consent for biological sampling and analysis. Such consent is also required for actual individual results to be sent to the employer. Alternatively, ranges of results can be sent to the employer by the physician who requested the test.
8. Ensure that procedures are in place for storing results in an appropriate, confidential manner, acting on the results, and evaluating the effectiveness of the program.

### **Interpretation of blood lead results and recommended actions**

In a steady-state situation, the measurement of blood lead levels is considered to be the best available indicator of current lead absorption. The blood lead level rises immediately after the first exposure and reaches a steady state in about a month. In cases of heavy exposure, it may rise after a few hours. The blood lead level decreases rapidly after exposure ceases, then more gradually thereafter. The average rate of decline is based on a half-life of about a month. (The half-life is the length of time required for the blood lead level to fall to half of its initial value.)

The following table shows the recommended actions for elevated blood lead levels.

Blood lead level	Retest recommendation	Recommended action
<0.48 µmol/L (<10 µg/dL)	None to annually	No specific actions are necessary.
0.48–0.96 µmol/L (10–19 µg/dL)	Every 6 months	<b>ALERT</b> Minimize exposure by reviewing all sources of exposure and improving protective measures.
0.97–1.44 µmol/L (20–29 µg/dL)	Every 1 month	<b>REMOVAL</b> <ol style="list-style-type: none"> <li>1. Remove the worker from further lead exposure if a repeat test is 0.97 µmol/L (20 µg/dL) or greater.</li> <li>2. Return the worker to previous duties when both of the following apply: <ul style="list-style-type: none"> <li>• The blood lead level is acceptable to a physician.</li> <li>• Exposure is minimized by reviewing all sources of exposure and improving protective measures.</li> </ul> </li> </ol>
≥1.45 µmol/L (≥30 µg/dL)	Monthly until the level is acceptable to a physician	<b>REMOVAL</b> <ol style="list-style-type: none"> <li>1. Remove the worker from further lead exposure.</li> <li>2. Return the worker to previous duties when both of the following apply: <ul style="list-style-type: none"> <li>• The blood lead level is acceptable to a physician.</li> <li>• Exposure is minimized by reviewing all sources of exposure and improving protective measures.</li> </ul> </li> </ol>

**Note:** During pregnancy, blood lead levels should be less than 0.48 µmol/L (10 µg/dL).



# Appendix E: Training courses

---

The U.S. Environmental Protection Agency has developed a number of training courses for inspectors, technicians, and abatement workers working with lead-containing paint:

- EPA/HUD Model Renovator Training Course — [epa.gov/lead/epahud-model-renovator-training-course](https://epa.gov/lead/epahud-model-renovator-training-course)
- EPA/HUD Model Lead Dust Sampling Technician Course — [epa.gov/lead/epahud-model-lead-dust-sampling-technician-training-course](https://epa.gov/lead/epahud-model-lead-dust-sampling-technician-training-course)
- EPA Model Lead-Based Paint Abatement Worker Training Course — [epa.gov/lead/epa-model-lead-based-paint-abatement-worker-training-course](https://epa.gov/lead/epa-model-lead-based-paint-abatement-worker-training-course)

The EPA has also accredited a number of lead worker training providers. You can search, by state, for accredited renovation training programs at [cfpub.epa.gov/flpp/searchrrp\\_training.htm](https://cfpub.epa.gov/flpp/searchrrp_training.htm).

# Appendix F: References

---

- Australian Standard (AS 4361.1 – 1995). Guide to lead paint management, Part 1: Industrial applications. Published by the Standards Association of Australia, NSW. 86 pp.
- Australian Standard (AS 4361.2 – a 1998). Guide to lead paint management, Part 2: Residential and commercial buildings (1998). Published by the Standards Association of Australia, NSW. 42 pp.
- Canada Mortgage and Housing Corporation (CMHC) (2004). Lead in your home.  
[healthyenvironmentforkids.ca/sites/healthyenvironmentforkids.ca/files/cpche-resources/CMHC\\_HC\\_PbPaint\\_2004.pdf](http://healthyenvironmentforkids.ca/sites/healthyenvironmentforkids.ca/files/cpche-resources/CMHC_HC_PbPaint_2004.pdf).
- Government of Alberta (2013). Occupational Health and Safety Bulletin — Lead at the work site. [work.alberta.ca/documents/OHS-Bulletin-ch071.pdf](http://work.alberta.ca/documents/OHS-Bulletin-ch071.pdf).
- Health and Safety Executive of the UK (HSE) (2002). Control of lead at work. [hse.gov.uk/pubns/books/l132.htm](http://hse.gov.uk/pubns/books/l132.htm).
- Health Canada (2013). Risk management strategy for lead.  
[hc-sc.gc.ca/ewh-semt/alt\\_formats/pdf/pubs/contaminants/prms\\_lead-psgr\\_plomb/prms\\_lead-psgr\\_plomb-eng.pdf](http://hc-sc.gc.ca/ewh-semt/alt_formats/pdf/pubs/contaminants/prms_lead-psgr_plomb/prms_lead-psgr_plomb-eng.pdf).
- New York State Department of Health (2009). Lead exposure in adults — a guide for health care providers. [health.ny.gov/publications/2584/](http://health.ny.gov/publications/2584/).
- . (2015). Health dangers from lead on the job. [health.ny.gov/publications/2543/](http://health.ny.gov/publications/2543/).
- . (2012). Lead on the job — a guide for employers. [health.ny.gov/publications/2585/](http://health.ny.gov/publications/2585/).
- Northwest Territories & Nunavut (2017). Working with lead guideline.  
[wscc.nt.ca/documents/working-lead-code-practice](http://wscc.nt.ca/documents/working-lead-code-practice).
- Ontario Ministry of Labour (2011). Lead on construction projects.  
[labour.gov.on.ca/english/hs/pubs/lead/index.php](http://labour.gov.on.ca/english/hs/pubs/lead/index.php).

- The Mount Sinai-Irving J. Selikoff Center for Occupational and Environmental Medicine (1998). Working with lead on bridges. [elcosh.org/en/document/130/d000134/working-with-lead-on-bridges.html#introduction](http://elcosh.org/en/document/130/d000134/working-with-lead-on-bridges.html#introduction).
- . (1998). Lead control guide for bridges and steel structures. [elcosh.org/en/document/129/d000133/lead-control-guide-for-bridges-and-steel-structures.html](http://elcosh.org/en/document/129/d000133/lead-control-guide-for-bridges-and-steel-structures.html).
- U.S. Department of Housing and Urban Development (HUD) (2012). HUD guidelines for the evaluation and control of lead-based paint hazards in housing. [hud.gov/offices/lead/lbp/hudguidelines/index.cfm](http://hud.gov/offices/lead/lbp/hudguidelines/index.cfm).
- U.S. Environmental Protection Agency (EPA) (2011). Small entity compliance guide to Renovate Right, EPA's lead-based paint renovation, repair, and painting program. [epa.gov/lead/small-entity-compliance-guide-renovate-right-epas-lead-based-paint-renovation-repair-and](http://epa.gov/lead/small-entity-compliance-guide-renovate-right-epas-lead-based-paint-renovation-repair-and).
- . (2001). Lead paint safety: A field guide for painting, home maintenance, and renovation work. [stacks.cdc.gov/view/cdc/11868](http://stacks.cdc.gov/view/cdc/11868).
- . (2001). Lead; identification of dangerous levels of lead; final rule (40 CFR Part 745). [federalregister.gov/documents/2001/01/05/01-84/lead-identification-of-dangerous-levels-of-lead](http://federalregister.gov/documents/2001/01/05/01-84/lead-identification-of-dangerous-levels-of-lead).
- U.S. National Institute of Occupational Safety and Health (NIOSH) (1992). Preventing lead poisoning in construction workers. [cdc.gov/niosh/docs/91-116/default.html](http://cdc.gov/niosh/docs/91-116/default.html).
- . (1997). Protecting workers exposed to lead-based paint hazards. [cdc.gov/niosh/docs/98-112/default.html](http://cdc.gov/niosh/docs/98-112/default.html).
- U.S. Occupational Safety and Health Administration (OSHA) Standard 03-08-001 (1978). Welding, cutting or heating of metals coated with lead-bearing paint. [osha.gov/pls/oshaweb/owadisp.show\\_document?p\\_table=DIRECTIVES&p\\_id=1821](http://osha.gov/pls/oshaweb/owadisp.show_document?p_table=DIRECTIVES&p_id=1821).
- . Technical Manual, Section V, Chapter 3. Controlling lead exposures in the construction industry: Engineering and work practice controls. [osha.gov/dts/osta/otm/otm\\_v/otm\\_v\\_3.html](http://osha.gov/dts/osta/otm/otm_v/otm_v_3.html).

## Notes

---

## Notes

---

## Notes

---



